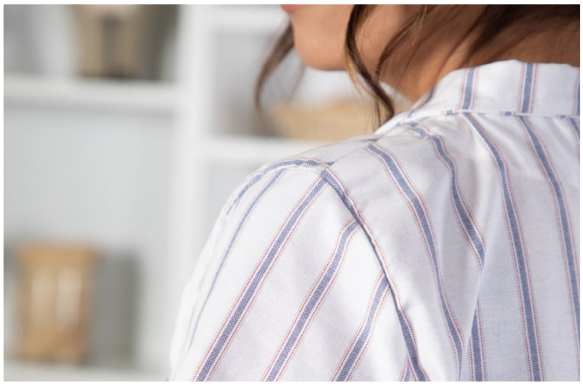

CLEAR CREEK CAMP SHIRT

PATTERN BY KIMBERLY PAYNE, SAMPLE BY BIANCA SPRINGER

Stitch a classic button-up shirt with notched collar and easy fit that's a timeless staple in any wardrobe.

FINISHED MEASUREMENTS									
	0	**2**	**4**	**6**	**8**	**10**	**12**	**14**	**16**
Bust	38½"	40"	41½"	43"	44½"	46"	47½"	49"	50½"
Waist	39½"	41"	42½"	44"	45½"	47"	48½"	50"	51½"
Hips	41½"	43"	44½"	46"	47½"	49"	50½"	52¼"	53¾"
	18	**20**	**22**	**24**	**26**	**28**	**30**	**32**	**34**
Bust	52"	53½"	55"	56½"	58"	59½"	61¼"	62¾"	64¼"
Waist	53"	54½"	56"	57½"	59"	60½"	62"	63½"	65"
Hips	55¼"	56¾"	58¼"	59¾"	61¼"	62¾"	64¼"	65¾"	67¼"

** Length is 23½" for all sizes.*

FABRIC REQUIREMENTS			
	44"-wide Fabric	**54"-wide Fabric**	**60"-wide Fabric**
Size 0–16	2 yards	1⅞ yards	1⅝ yards
Size 18–34	2⅛ yards	2 yards	2 yards

SUPPLIES

- Clear Creek Camp Shirt pattern
- Shirting fabric (such as chambray; amount according to chart)
- Lightweight fusible interfacing
- Matching all-purpose thread
- Five TK"-diameter buttons
- Serger (optional)

PREPARE

Print and tile the pattern. Cut out all pattern pieces in the desired size.

From the fabric, cut two fronts, one back on the fold, two sleeves, two front facings, one back facing on the fold, two collars on the fold and one pocket. Transfer all pattern markings. Designate one collar as the upper collar and the remaining as the under collar.

From the interfacing, cut one collar, two front facings and one back facing on the fold. Fuse the interfacing to the upper-collar wrong side and the corresponding facing wrong sides according to the manufacturer's instructions.

CONSTRUCT

Use ⅝" seam allowances unless otherwise noted, and stitch with right sides together.

Pin the upper collar and under collar together along the sides and upper curved edge; stitch. Trim the seam allowance and corners to reduce bulk. Turn the collar right side out, making sure to push the corners out; press flat. Baste the collars together along the lower edge **(1)**.

Pin the shirt back and front together along the shoulder seams; stitch **(2)**.

Zigzag- or serge-finish each seam allowance individually, then press open.

Baste along each front neckline seamline. Clip into the seam allowance at each front-neckline pattern marking, up to, but not through, the stitching line **(3)**. Designate the clip as a notch.

Position the shirt fronts right side up on a flat work surface. Position the collar over the front with the upper collar facing the shirt right side and aligning the pattern markings; pin the collar to the shirt at the notch **(4)**.

Working from the shirt wrong side, insert the needle into the notch point at the neckline and remove the pin. Rotate the collar edge to match the neckline raw edge. Using the basting stitches as a guide, stitch from the notch toward the center front.

Insert the needle back into the notch point. Stitch from the notch to the back neckline, making sure the excess shirt fabric is pulled out of the way and not to stretch the shirt during stitching **(5)**.

Repeat to stitch the opposite collar side. Check the shirt right side for any tucks or folds in the fabric **(6)**.

Pin the front and back facings together along the shoulder seams; stitch **(7)**.

Press open each seam allowance. Press each facing outer edge ⅝" toward the wrong side **(8)**.

Pin the shirt and facings together, aligning the seamlines, center back and center-front edges. Beginning and ending 2" above one front-facing lower edge, stitch the facing center-front edges and neckline, following the previous stitching instructions when stitching around the collar **(9)**.

1


2
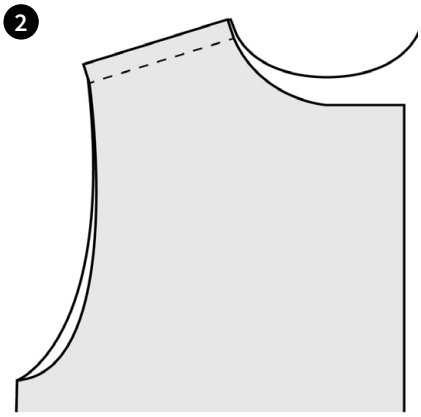

3
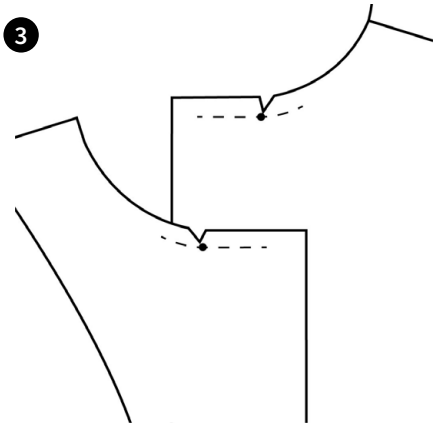

4
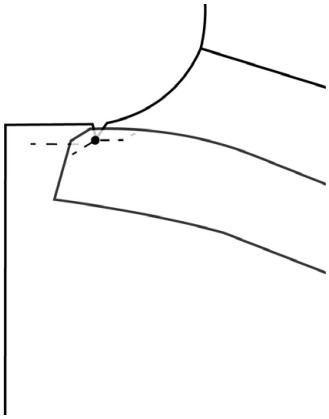

5
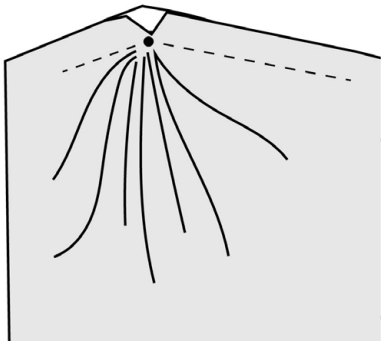

6
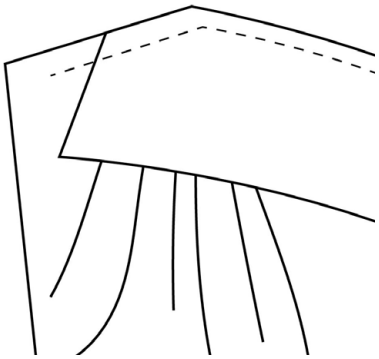

7
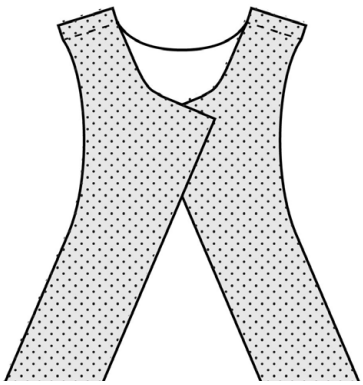

8
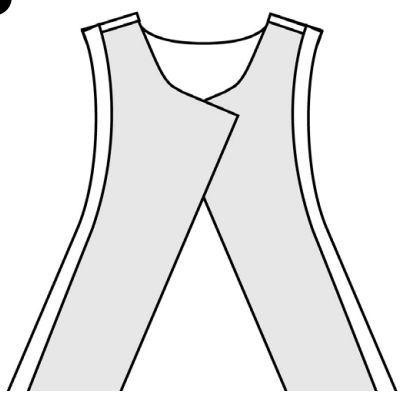

9
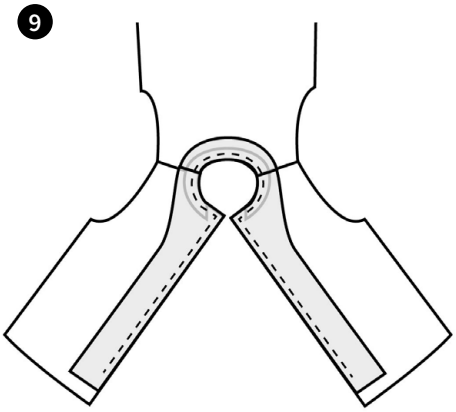

Trim the seam allowance and corners, and then clip along the curved neckline **(10)**.

Fold the shirt lower edge 2¼" toward the right side along one center-front edge. Fold the raw edge ¼" toward the hem wrong side and pin. Stitch the hem to the shirt along the seam between the front and facing with the ¼" fold intact **(11)**.

Repeat to stitch the hem on the opposite center-front edge.

Fold the shirt hem toward the wrong side, tucking the facing into the hem; press **(12)**.

Beginning at the shirt hem, stitch the facing to the shirt along the outer folded edge **(13)**.

Pin the shirt fronts and back along each side seam; stitch **(14)**. Zigzag- or serge-finish each seam allowance individually, then press open.

Fold the shirt lower raw edge ¼" toward the wrong side; press. Fold again 2" toward the wrong side and press. Topstitch the shirt hem 1⅞" from the folded lower edge **(15)**.

10

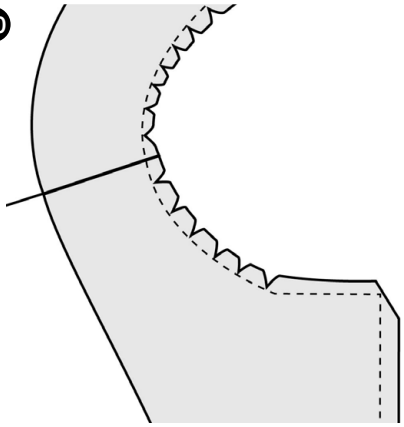

11



12



13

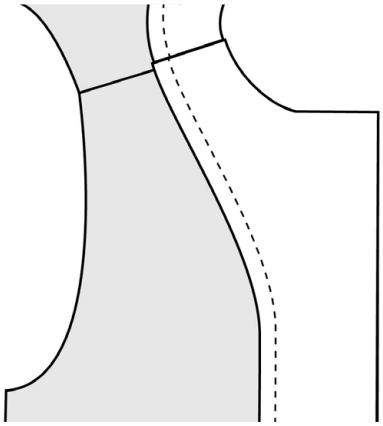

14

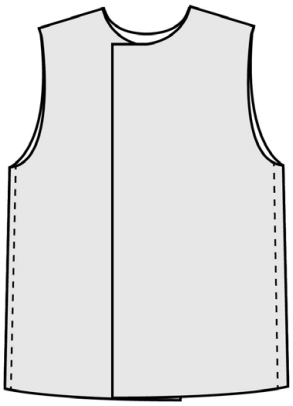

15

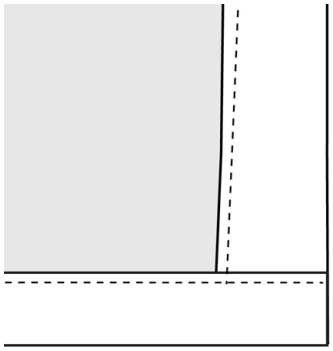

Repeat to hem both sleeve lower edges.

Select a gathering stitch on the machine. Stitch one sleeve cap between the pattern markings using a ¼" seam allowance **(16)**.

Pin the sleeve underarm seam together; stitch. Zigzag- or serge-finish each seam allowance individually **(17)**. Press the seam allowance open, then turn the sleeve right side out.

Repeat to construct the remaining sleeve.

Turn the shirt wrong side out. Insert one sleeve into the corresponding armscye with right sides together, aligning the seamlines and pattern markings, and pin. Ease the sleeve cap into the armscye between the pattern markings.

Beginning at the underarm seamline, stitch the sleeve to the armscye **(18)**. Trim the seam allowance, then zigzag- or serge-finish the seam allowance.

Repeat to attach the remaining sleeve to the opposite armscye.

Fold the collar at each shirt front along the foldline; press.

Machine stitch the buttonholes according to the pattern markings.

Using the buttonholes as a guide, mark the button placements on the shirt right front. Attach the buttons **(19)**.

Fold the pocket upper edge ¼" toward the wrong side; press. Fold again 1" toward the wrong side and press. Topstitch the pocket hem ⅞" from the folded upper edge. Fold the pocket sides and lower edge ¼" toward the wrong side; press **(20)**.

Position the pocket over the shirt at the pattern markings with right sides facing up; pin. Topstitch the pocket sides and lower edge using a ⅛" seam allowance.

16

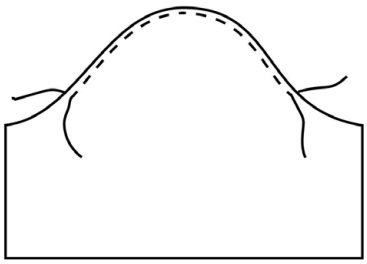

17

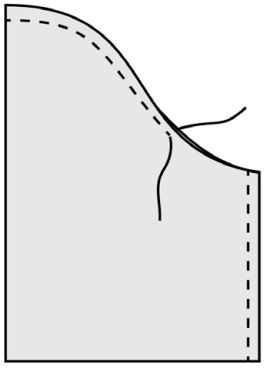

18

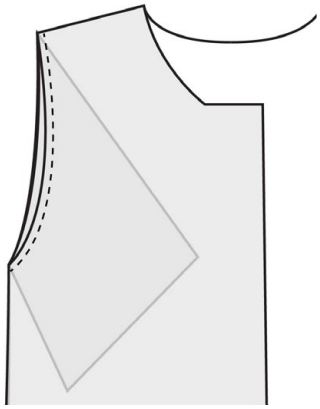

19

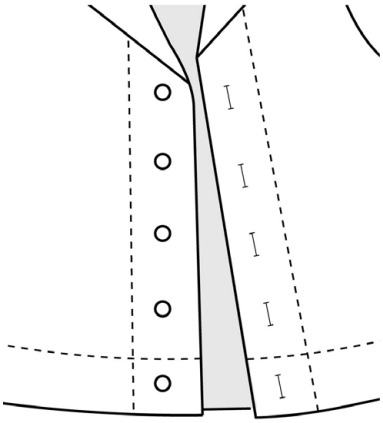

20

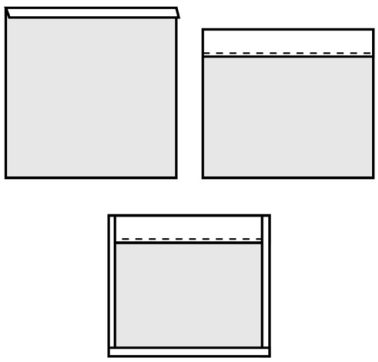

READ MORE button and buttonhole tips on page 13.

SEW NEWS
The Trusted Sewing Source

CLEAR CREEK CAMP SHIRT

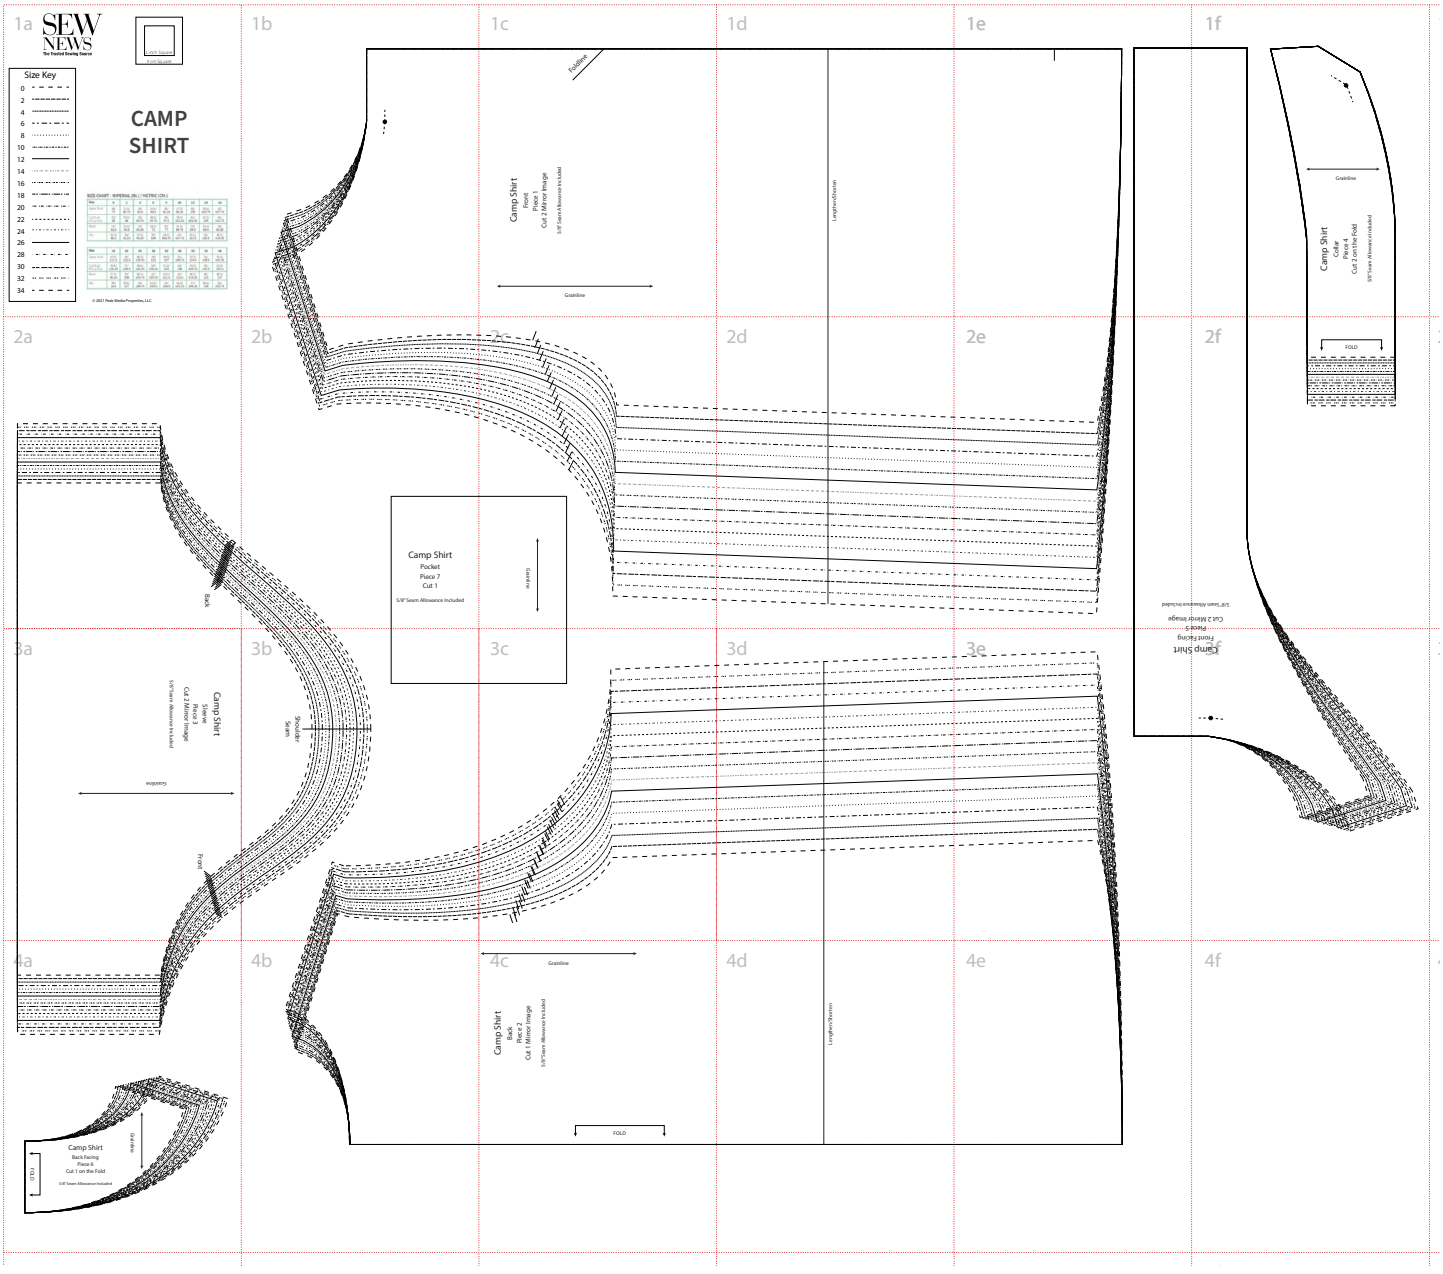

Template overview

1" Test Square

23 pages: 1a–1f; 2a–2f; 3a–3f; 4a–4e

Print this page first at 100%, then measure the 1" test square before printing the full pattern.

© 2021 Peak Media Properties, LLC.

1a

SEW NEWS
The Trusted Sewing Source



Size Key

0	
2	
4	
6	
8	
10	
12	
14	
16	
18	
20	
22	
24	
26	
28	
30	
32	
34	

CAMP SHIRT

SIZE CHART - IMPERIAL (IN.) / METRIC (CM.)

Size	0	2	4	6	8	10	12	14	16
Upper Bust	30/ 77	31.5/ 80.75	33/ 84.5	34.5/ 88.5	36/ 92.25	37.5/ 96.25	39/ 100	40.5/ 103.75	42/ 107.75
Full Bust B Cup Size	32/ 82	33.5/ 86	35/ 89.75	36.5/ 93.75	38/ 97.5	39.5/ 101.25	41/ 105.25	42.5/ 109	44/ 112.75
Waist	24/ 61.5	25.5/ 65.5	27/ 69.25	28.5/ 73	30/ 77	31.5/ 80.75	33/ 84.5	34.5/ 88.5	36/ 92.25
Hip	34.5/ 88.5	36/ 92.25	37.5/ 96.25	39/ 100	40.5/ 103.75	42/ 107.75	43.5/ 111.5	45/ 115.5	46.5/ 119.25

Size	18	20	22	24	26	28	30	32	34
Upper Bust	43.5/ 111.5	45/ 115.5	46.5/ 119.25	48/ 123	49.5/ 127	51/ 130.75	52.5/ 134.5	54/ 138.5	55.5/ 142.25
Full Bust B Cup Size	45.5/ 116.75	47/ 120.5	48.5/ 124.25	50/ 128.25	51.5/ 132	53/ 136	54.5/ 139.75	56/ 143.5	57.5/ 147.5
Waist	37.5/ 96.25	39/ 100	40.5/ 103.75	42/ 107.75	43.5/ 111.5	45/ 115.5	46.5/ 119.25	48/ 123	49.5/ 127
Hip	48/ 123	49.5/ 127	51/ 130.75	52.5/ 134.5	54/ 138.5	55.5/ 142.25	57/ 146.25	58.5/ 150	60/ 153.75

© 2021 Peak Media Properties, LLC.

1b

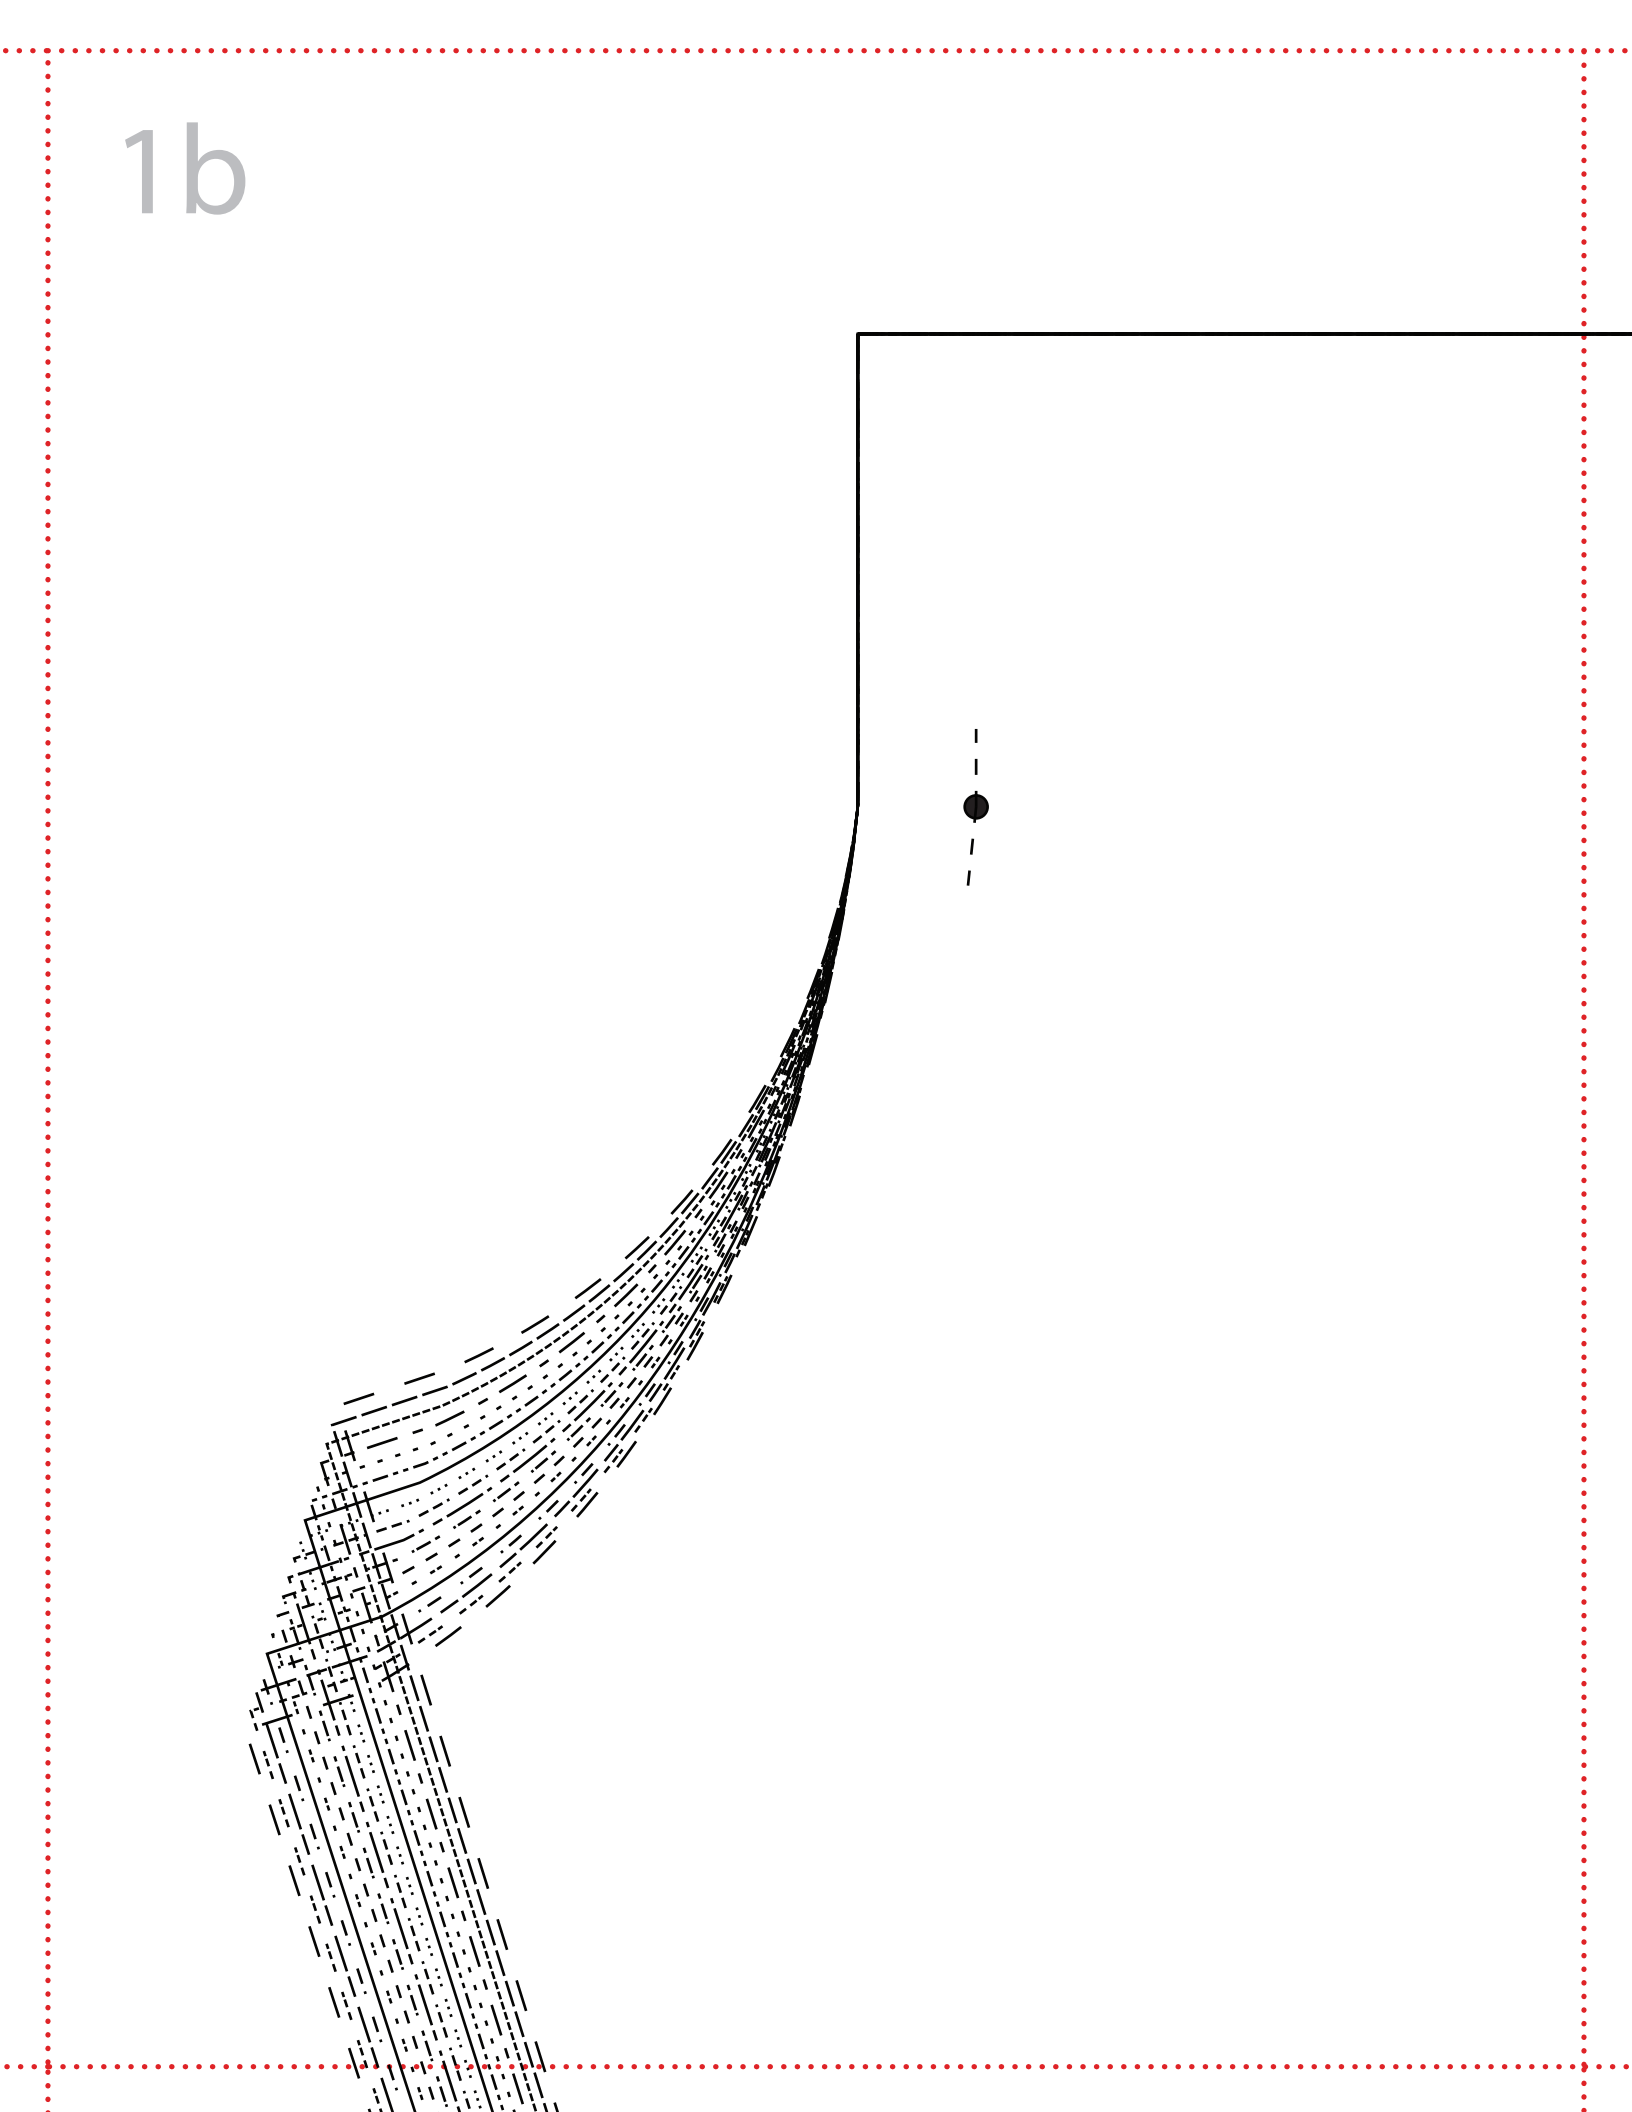

Camp Shirt

Front

Piece 1

Cut 2 Mirror Image

5/8" Seam Allowance Included



1d

Lengthen/Shorten

1e

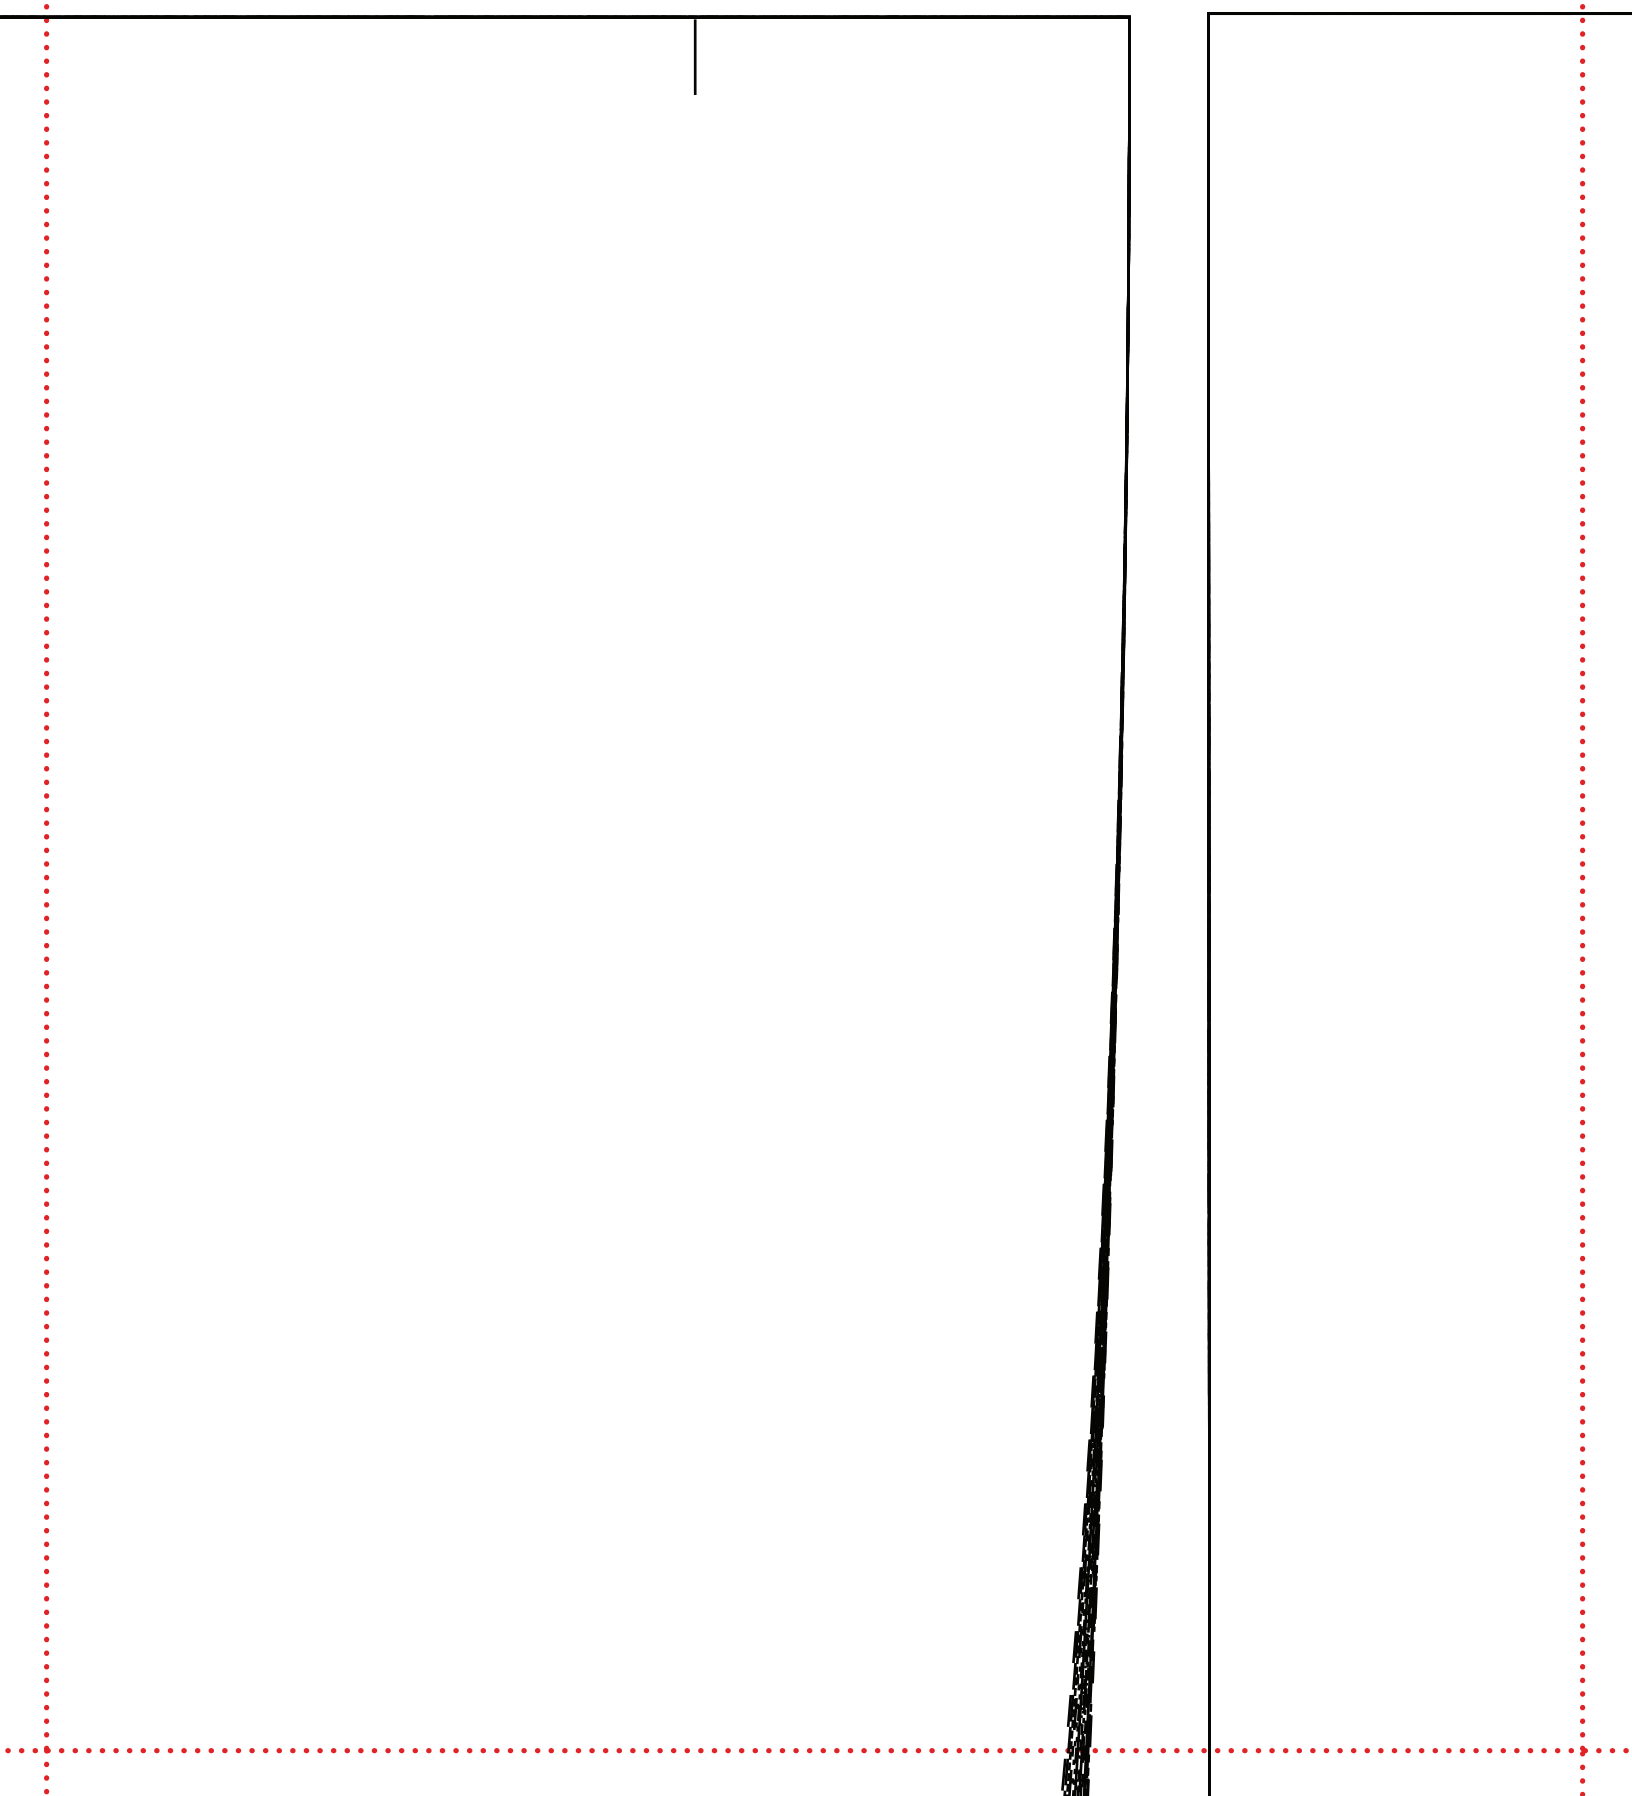

1f

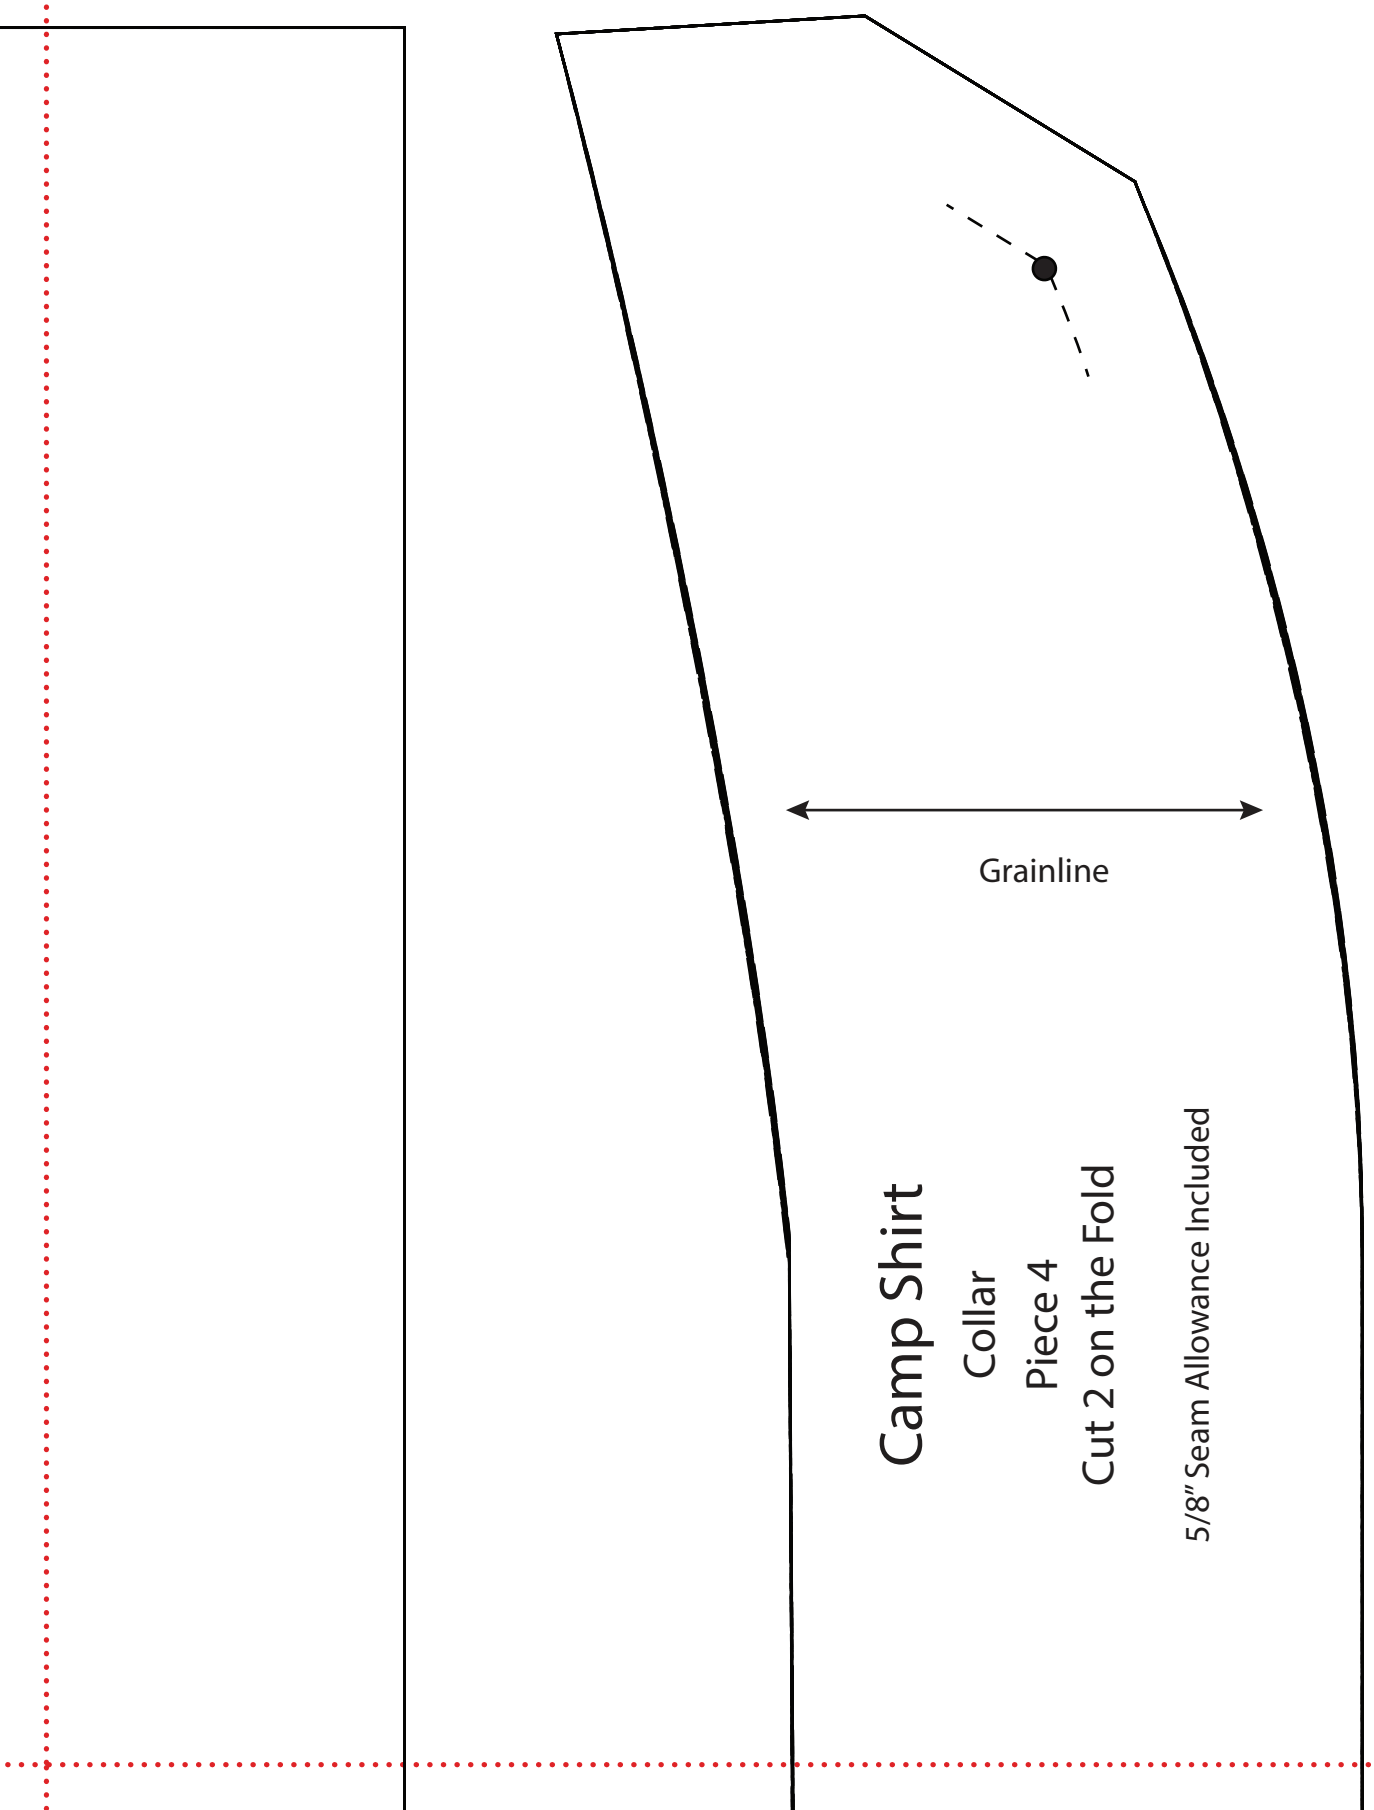
Grainline
Camp Shirt
Collar
Piece 4
Cut 2 on the Fold
5/8" Seam Allowance Included

2a

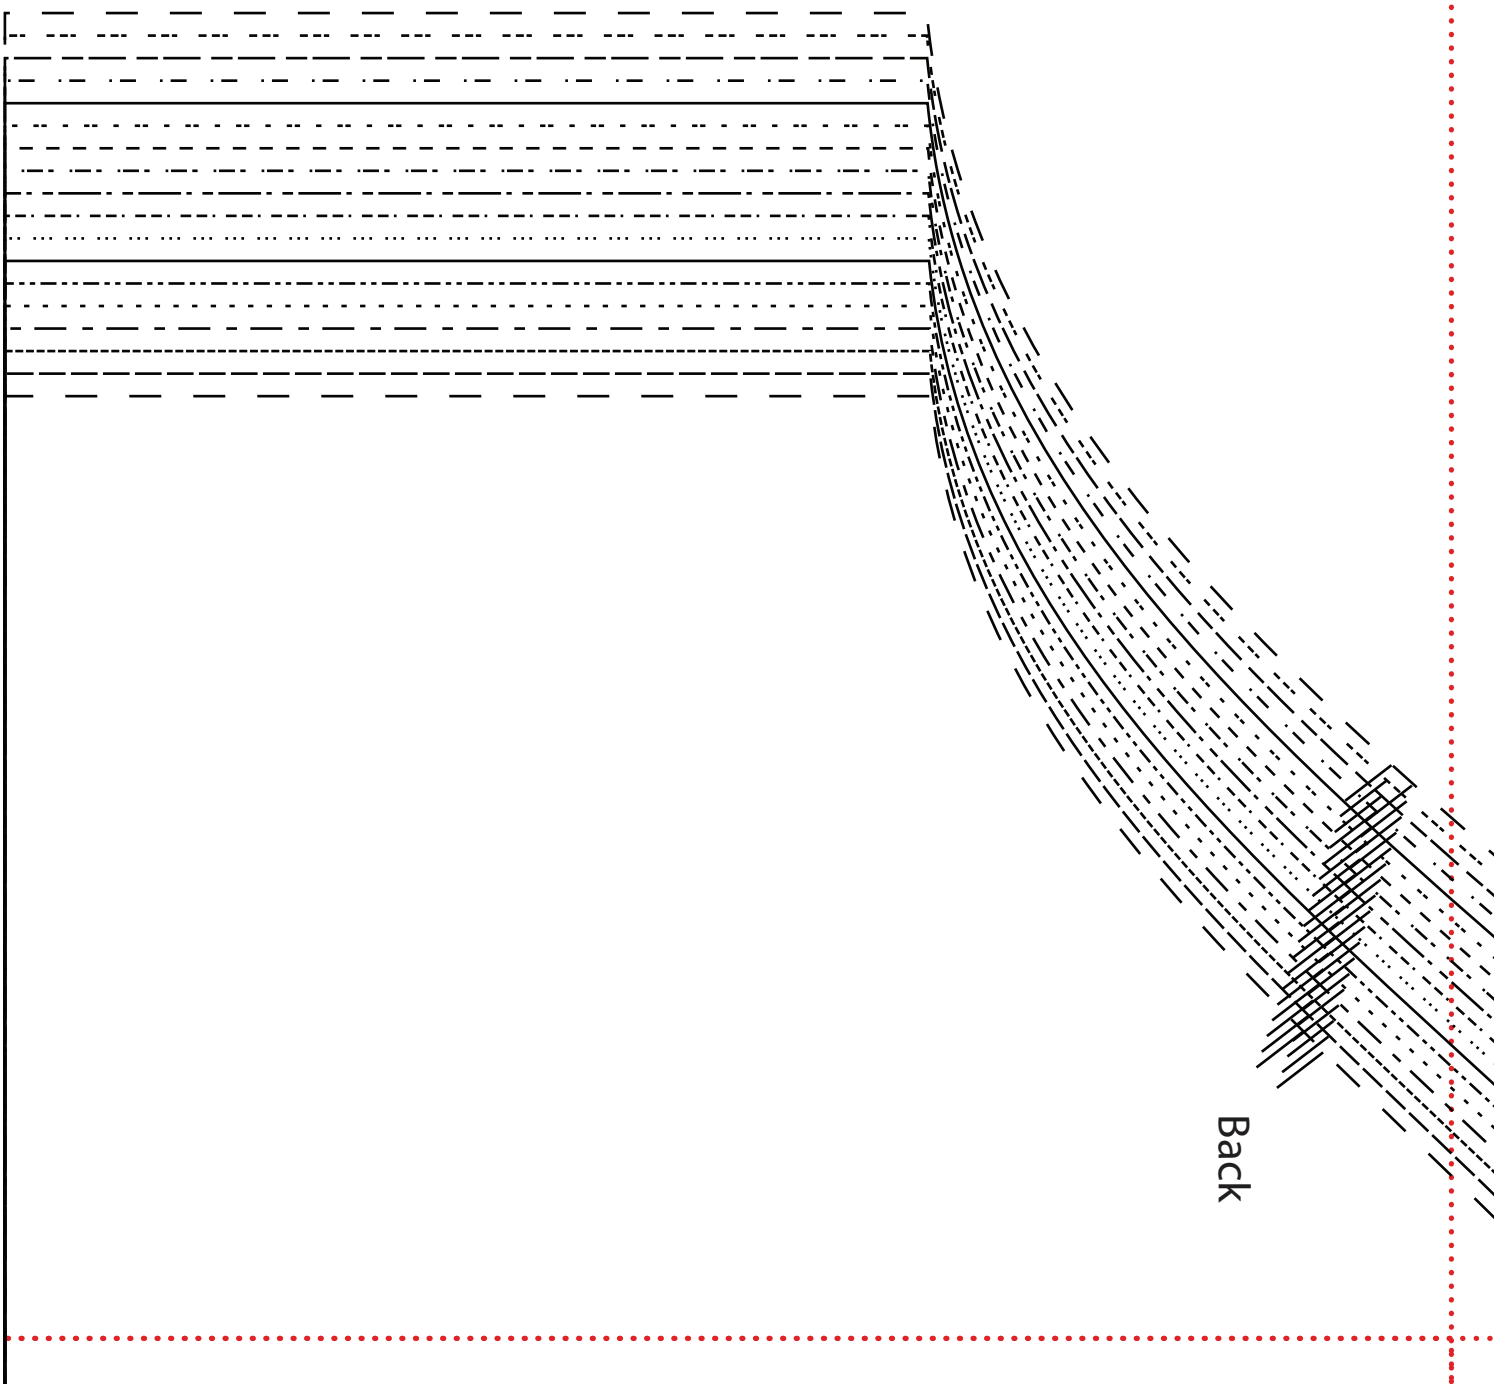

2b

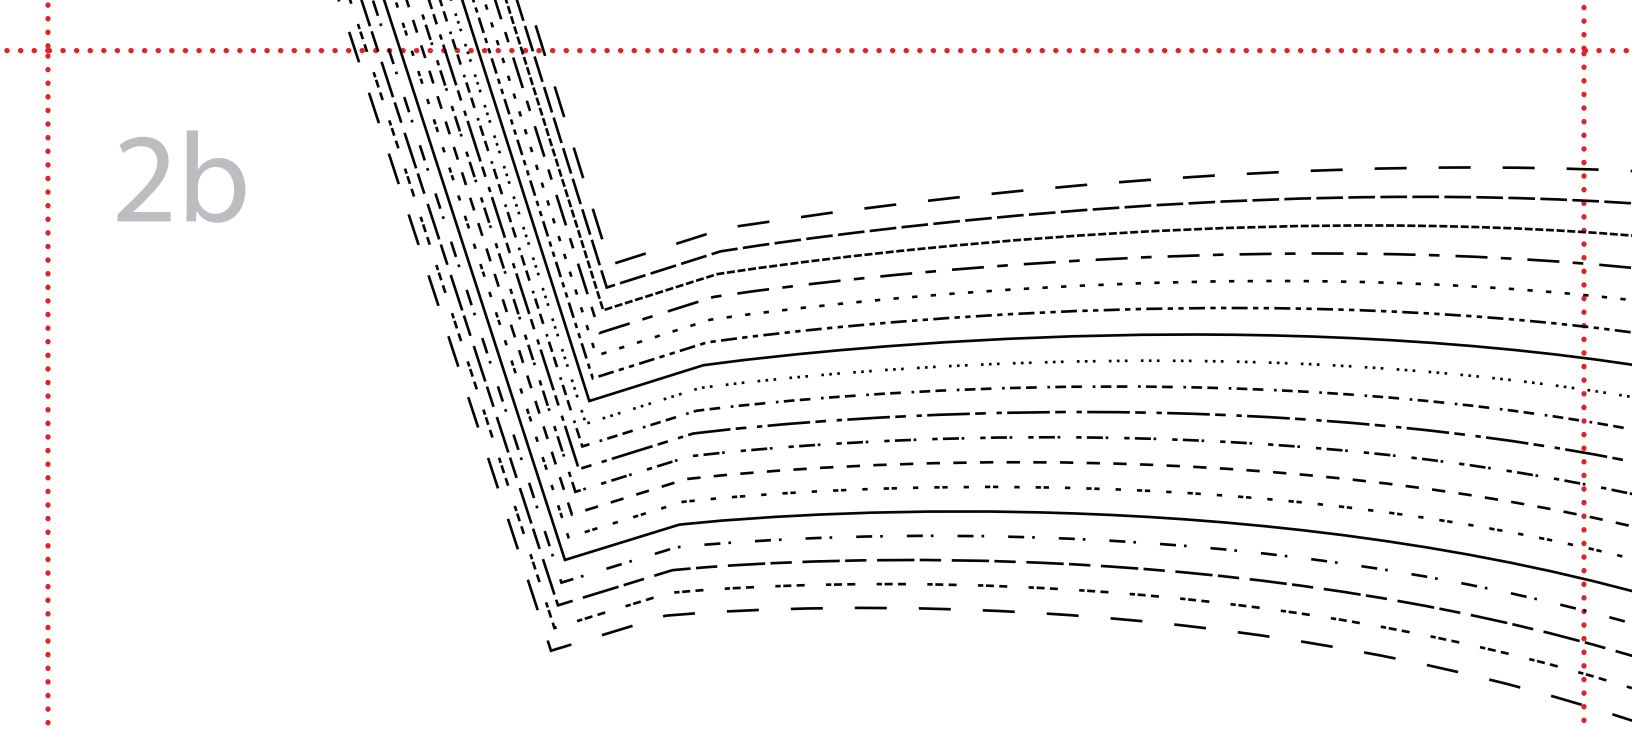

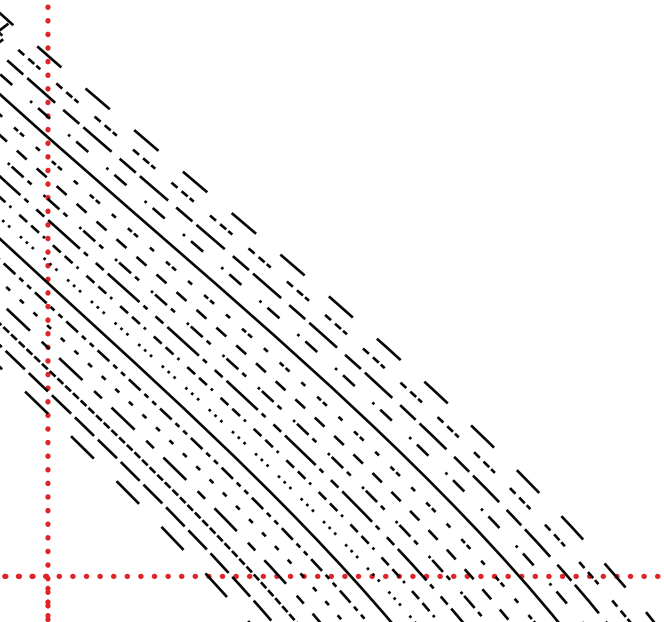

Camp Shirt

Pocket

Piece 7

Cut 1

5/8" Seam Allowance Included

2c

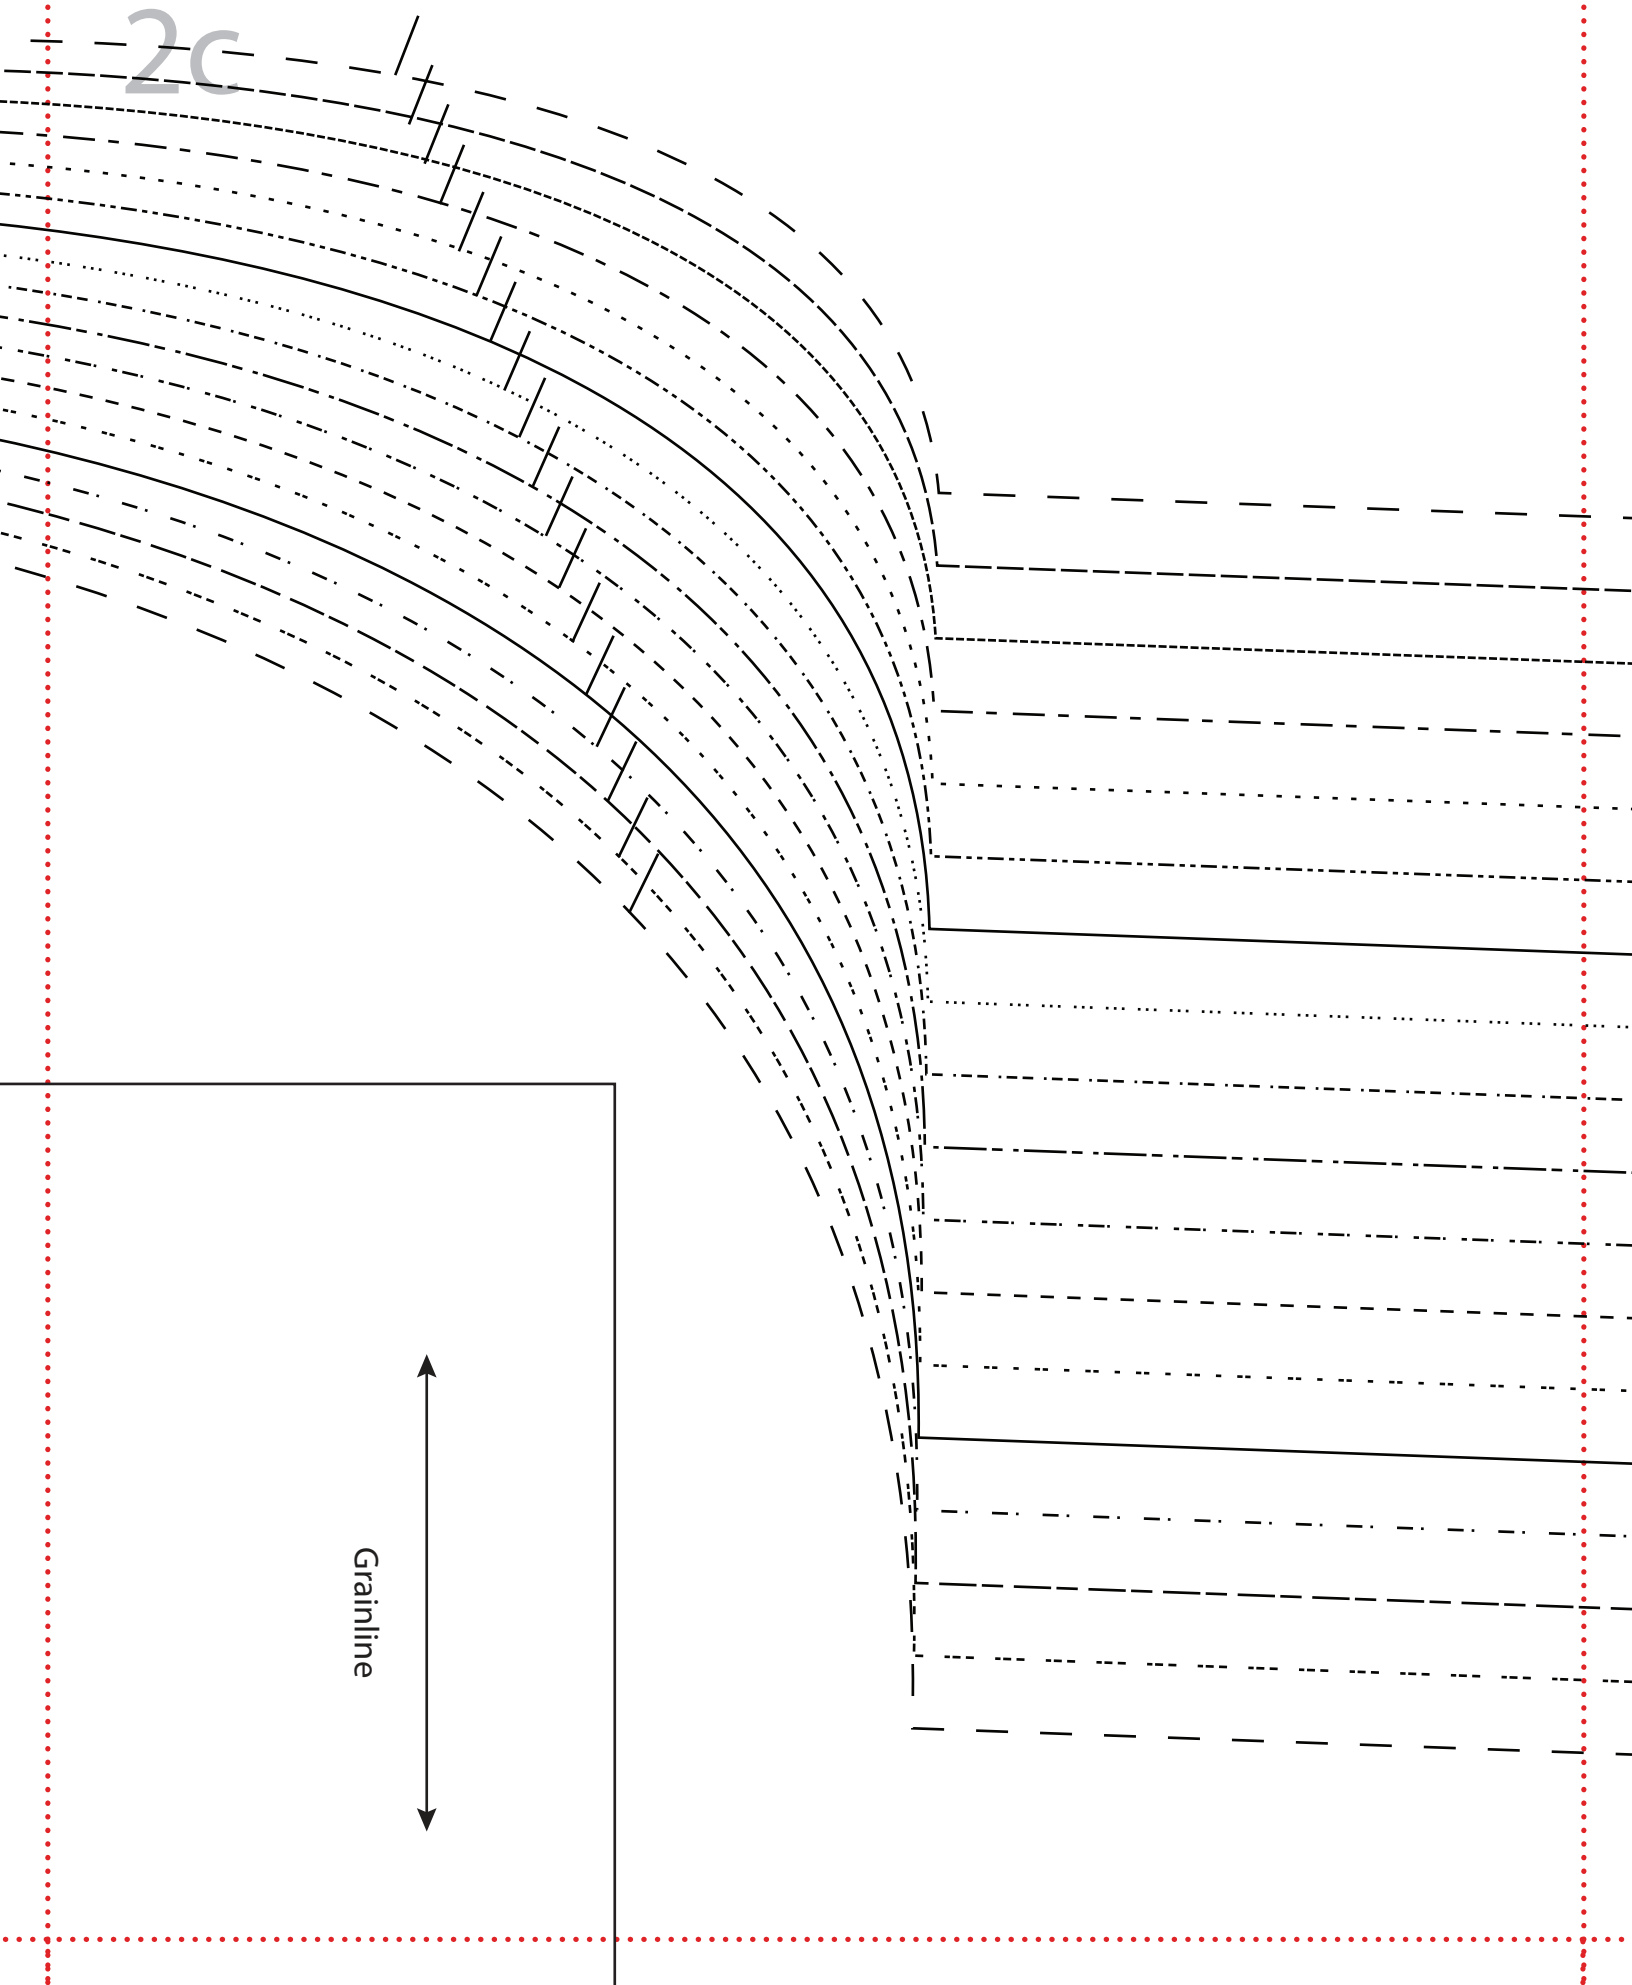

2d

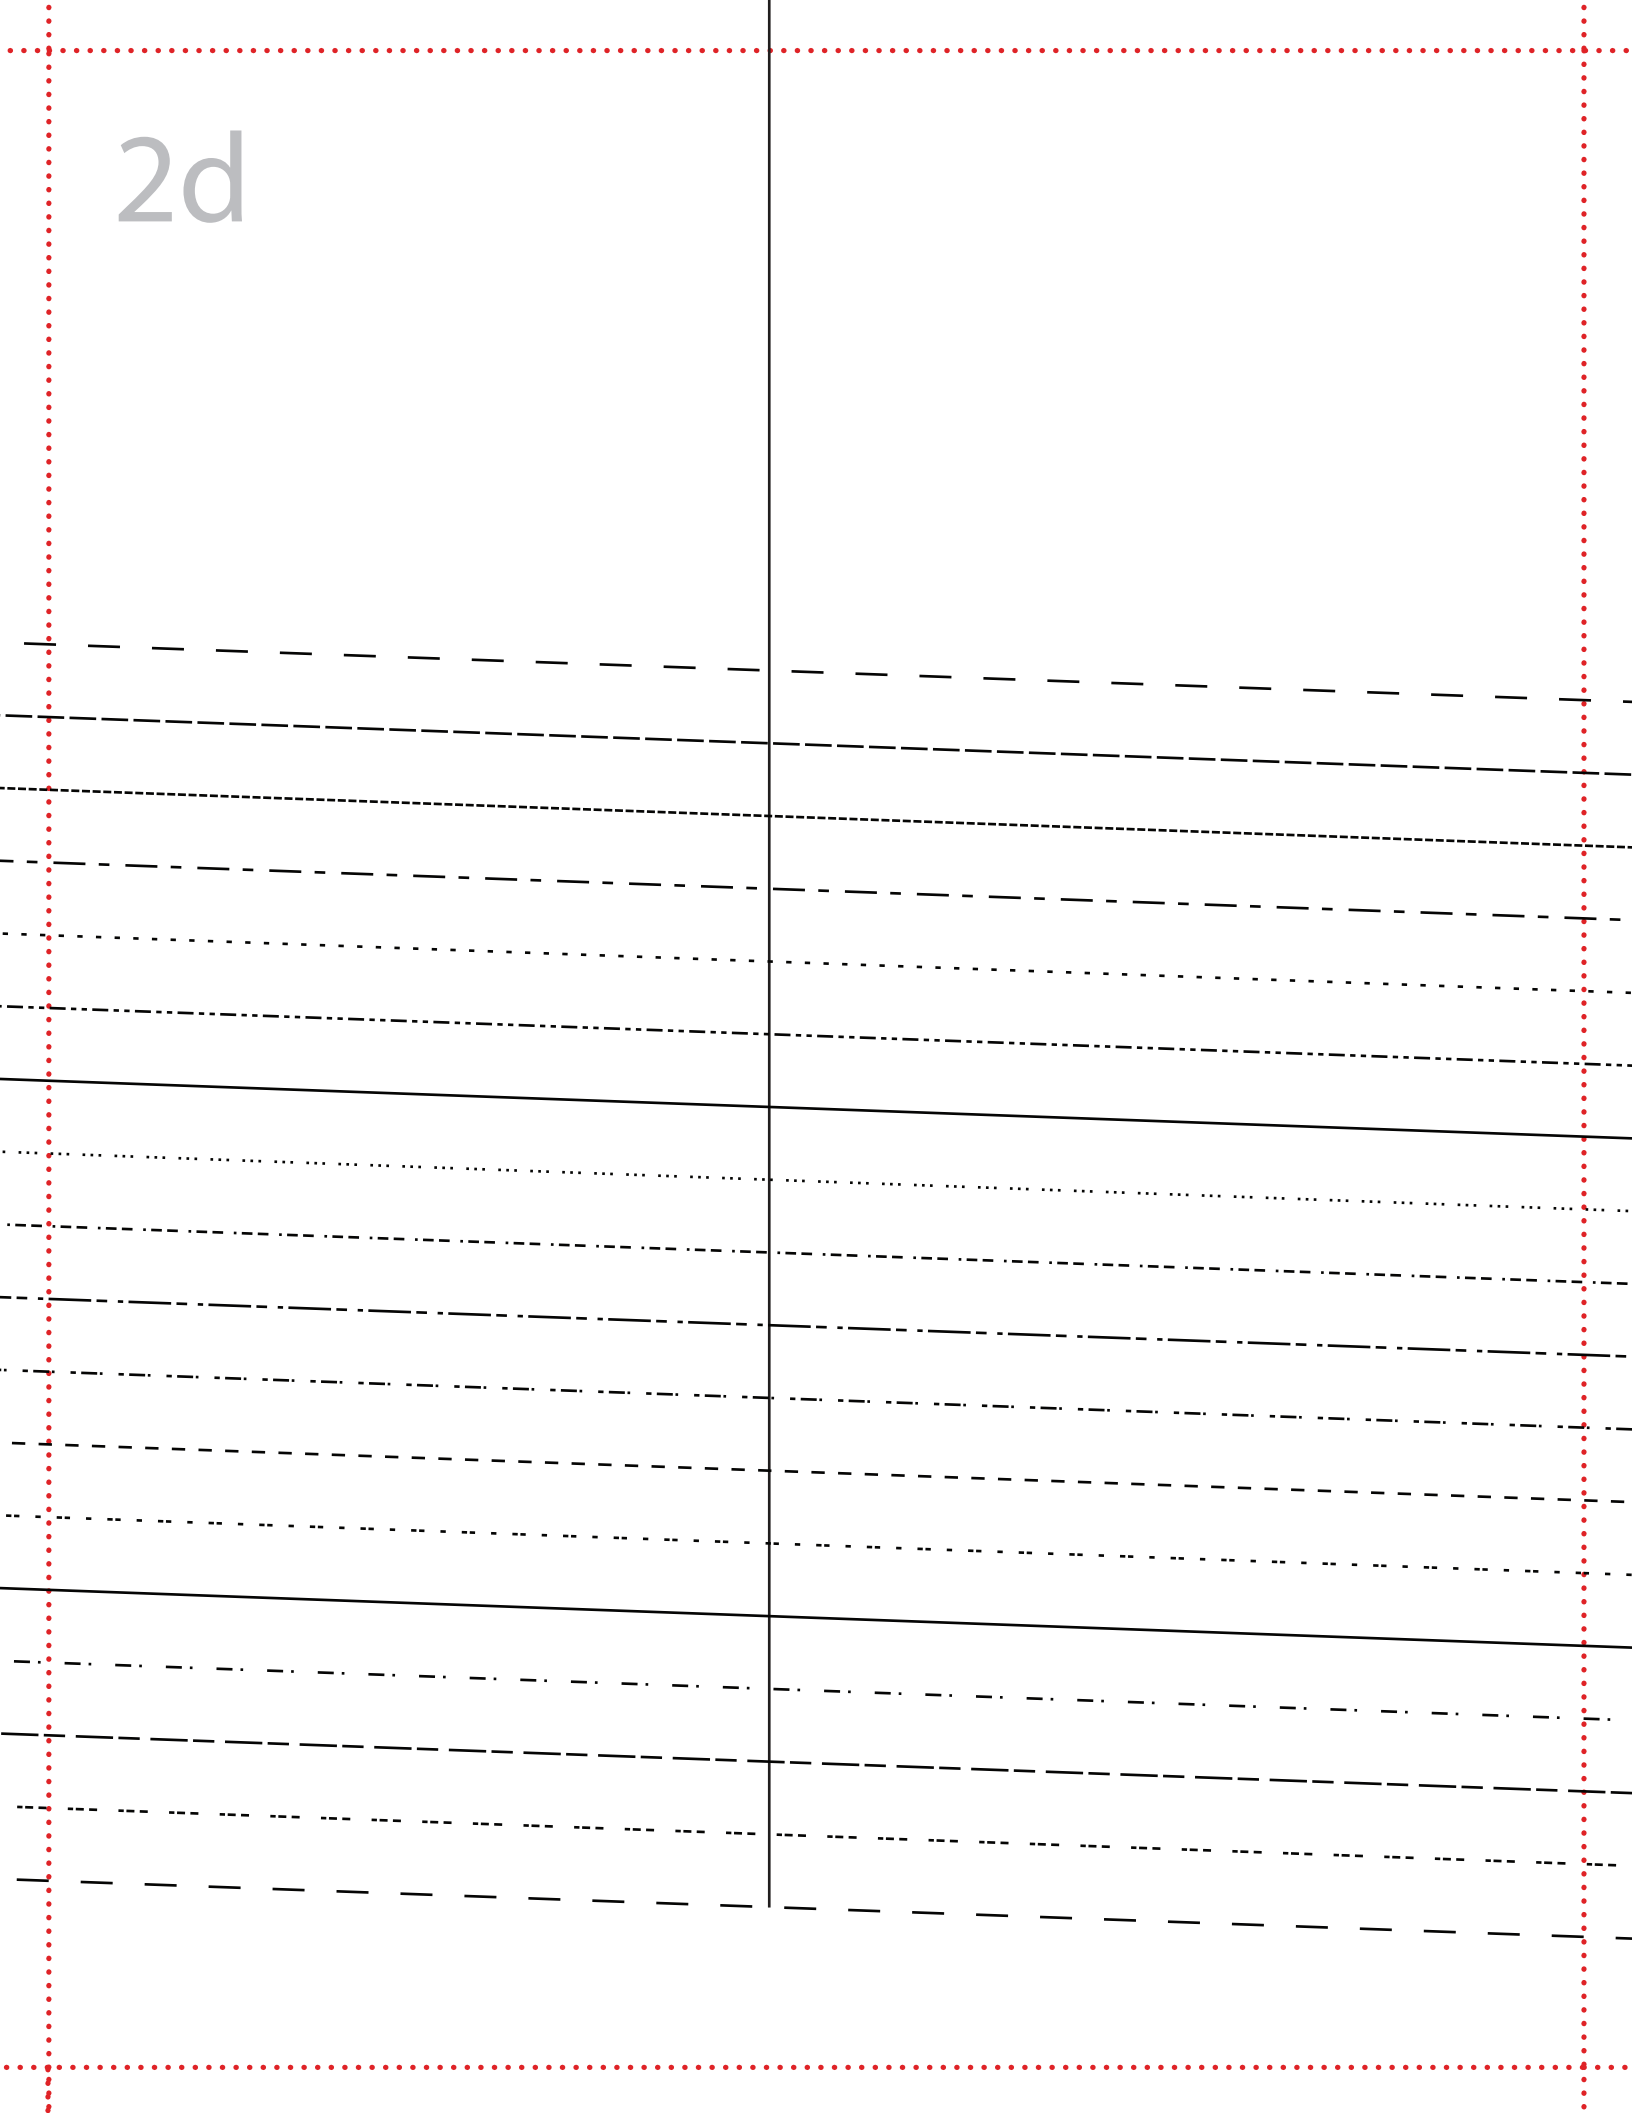

ece 5

rror Image

owance Included

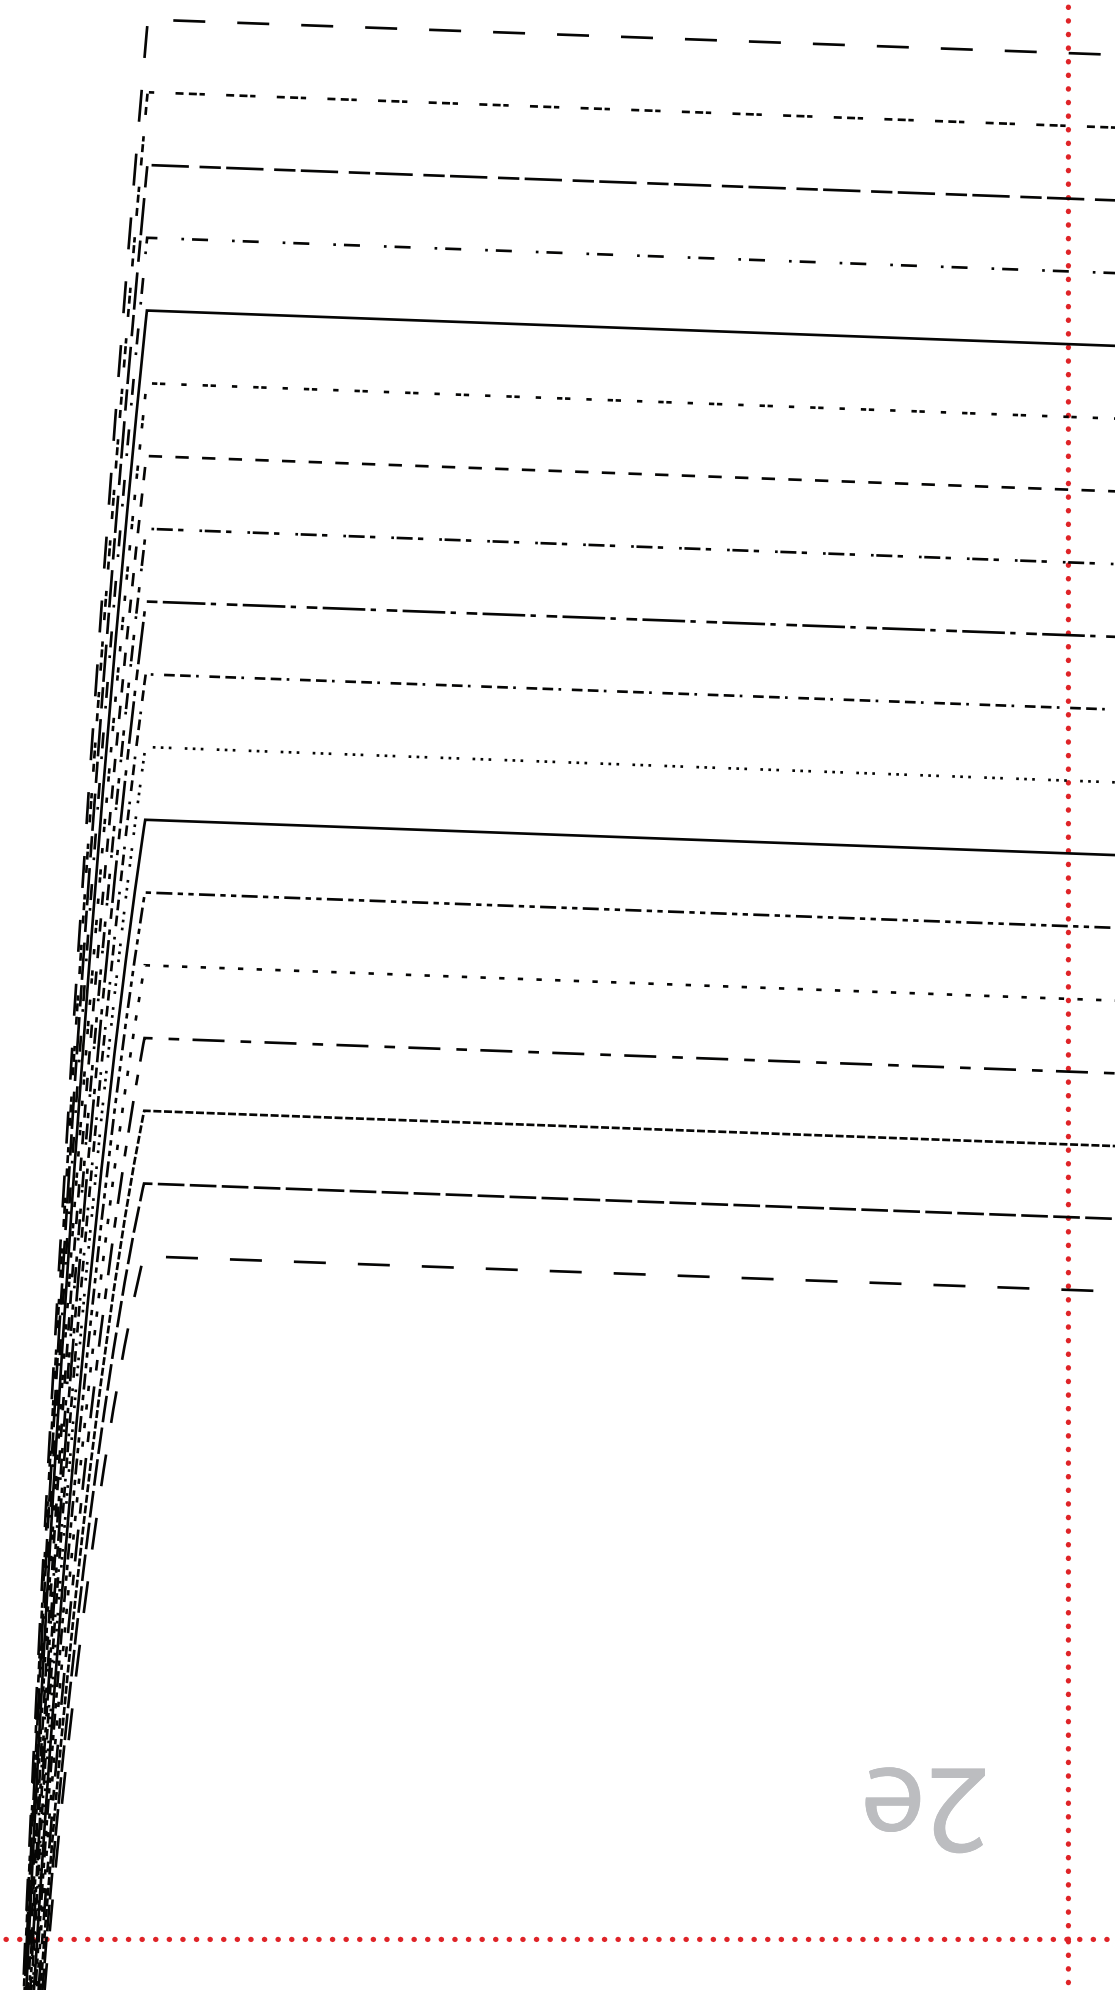

2f

Piece 5

Cut 2 Mirror I

5/8" Seam Allowance

Camp Shirt

Sleeve

Piece 3

Cut 2 Mirror Image

5/8" Seam Allowance Included

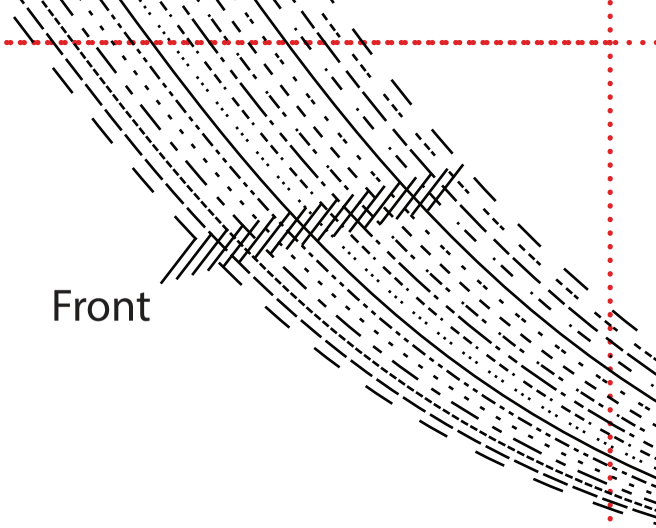

3a

3b

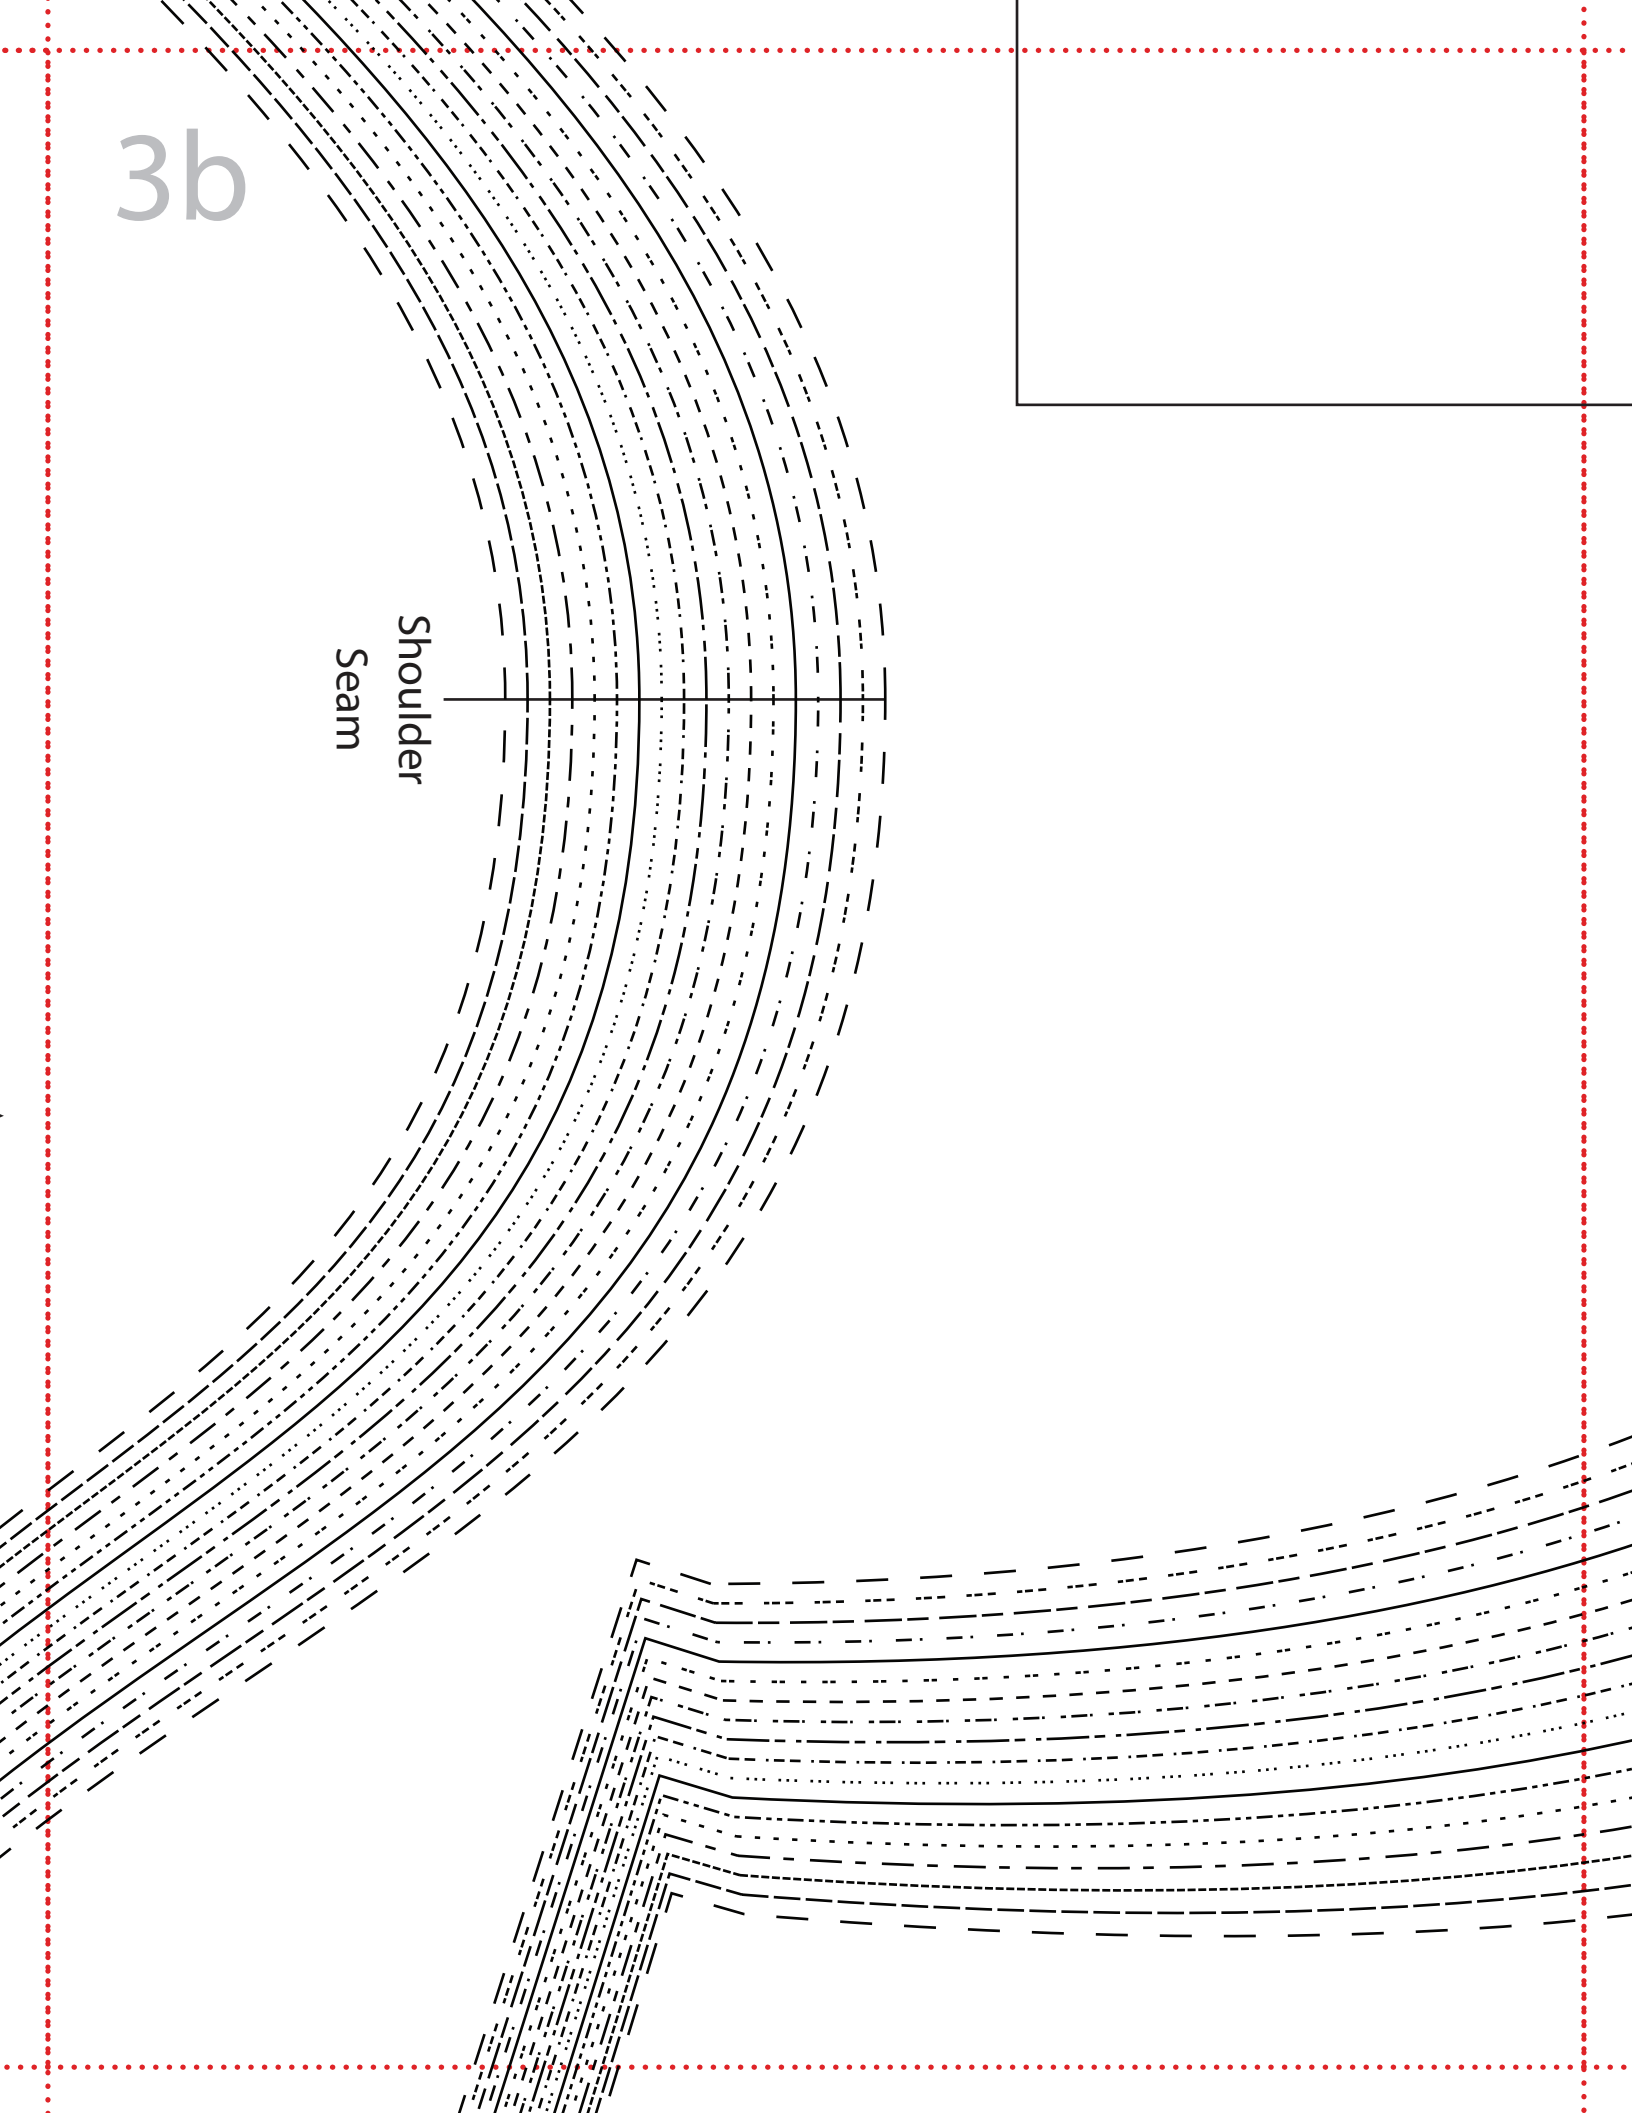

3c

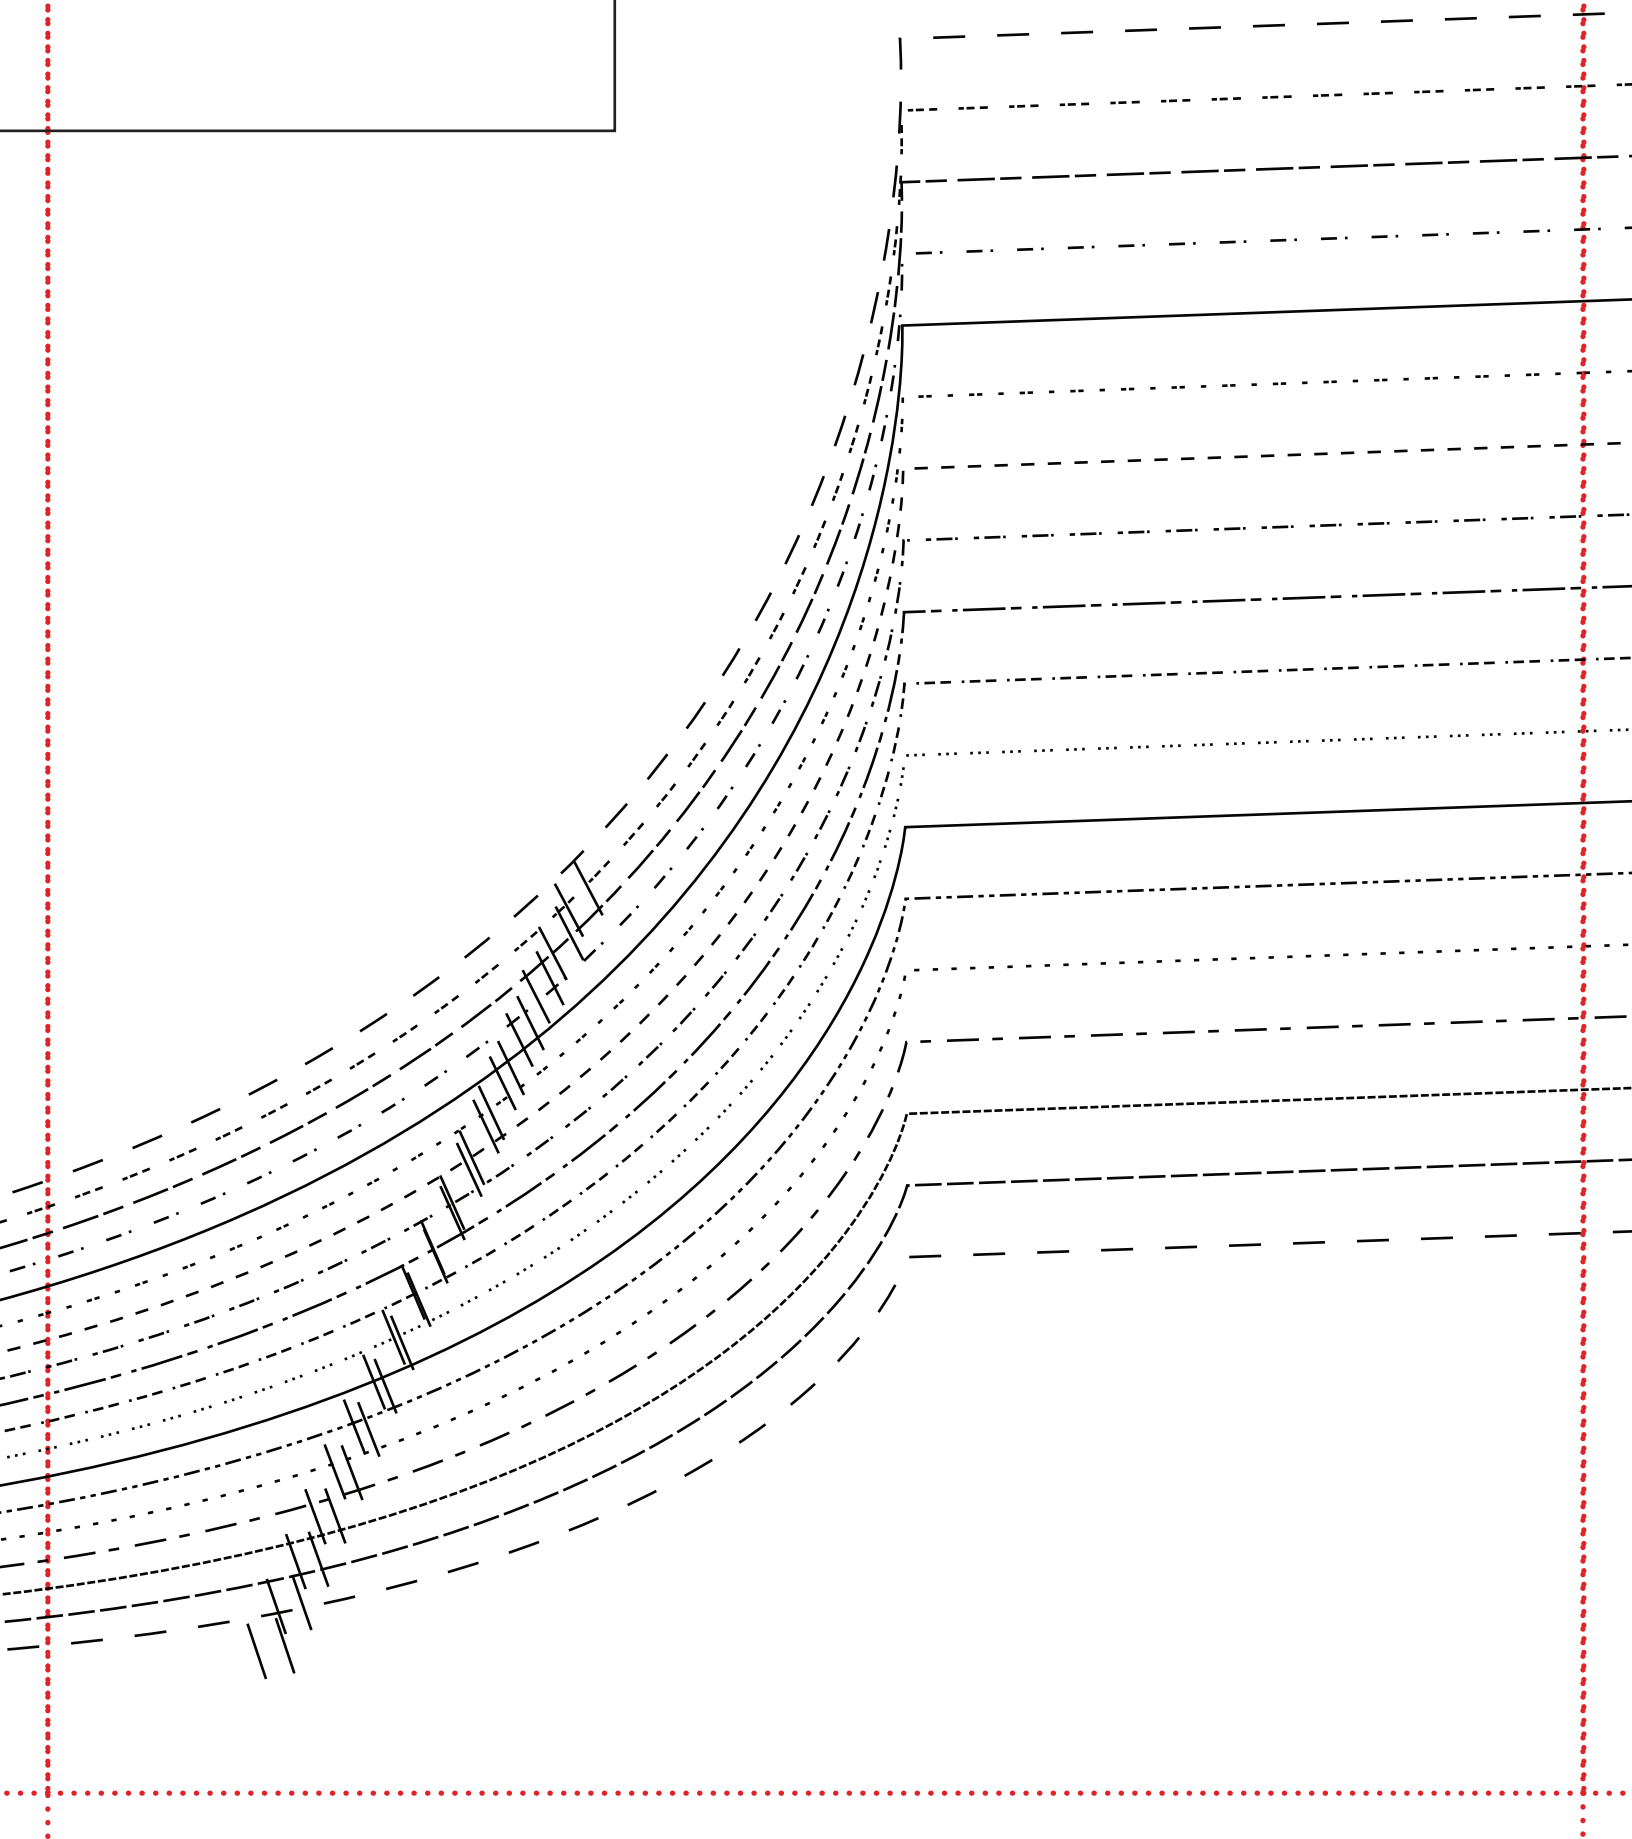

3d

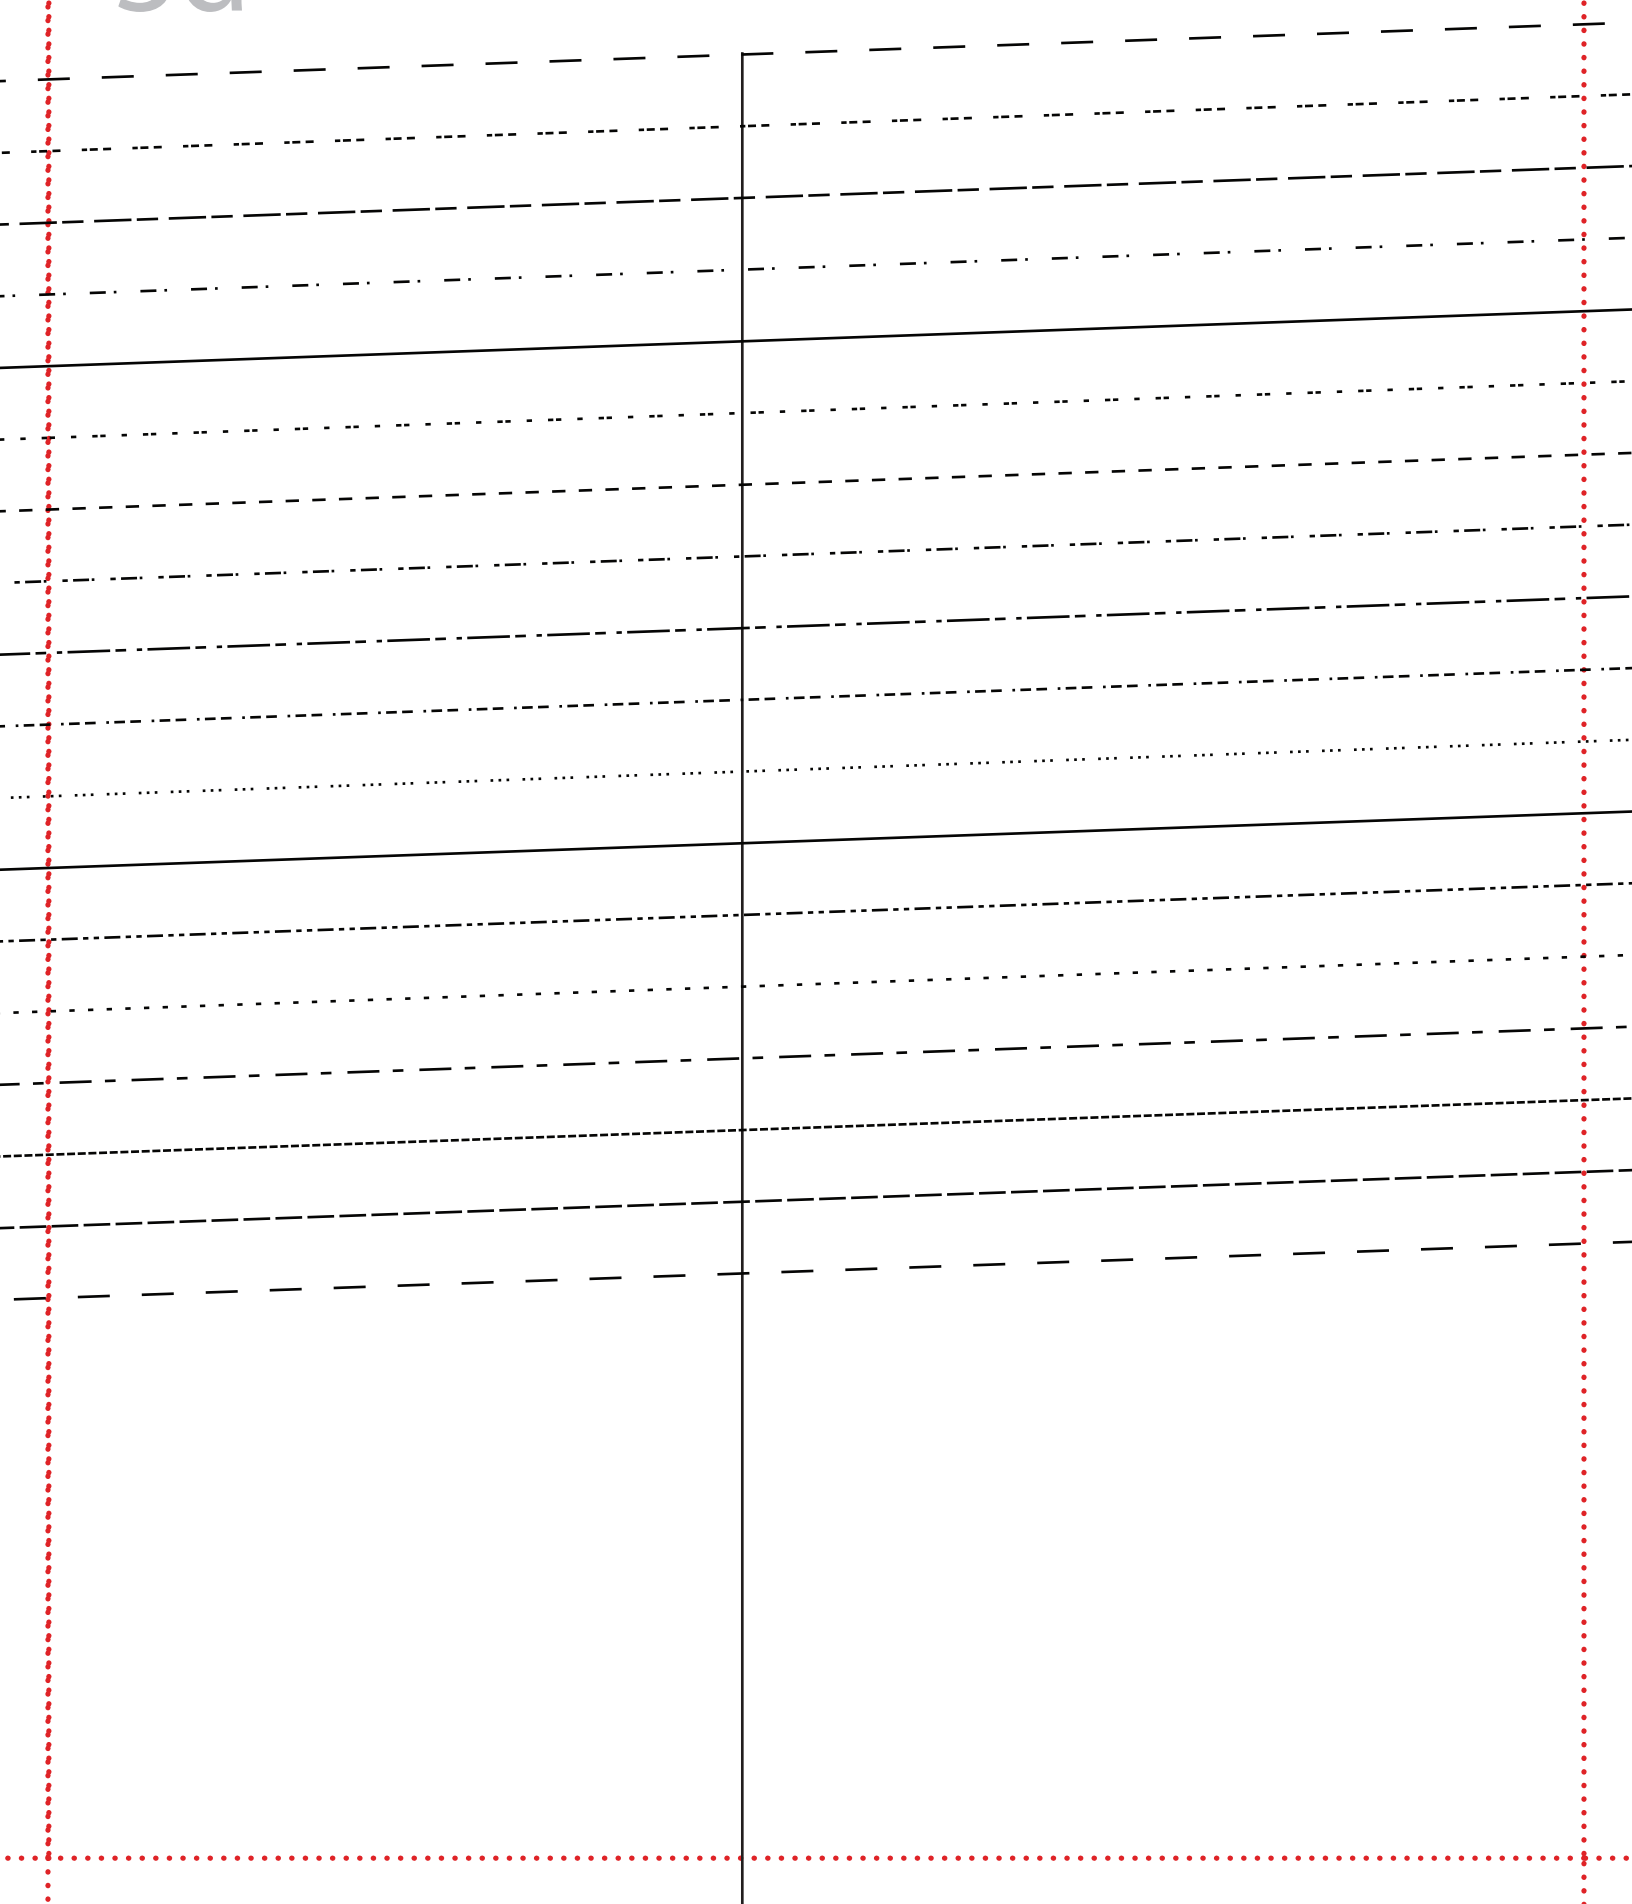

3e

p Shirt

t Facing

ece 5

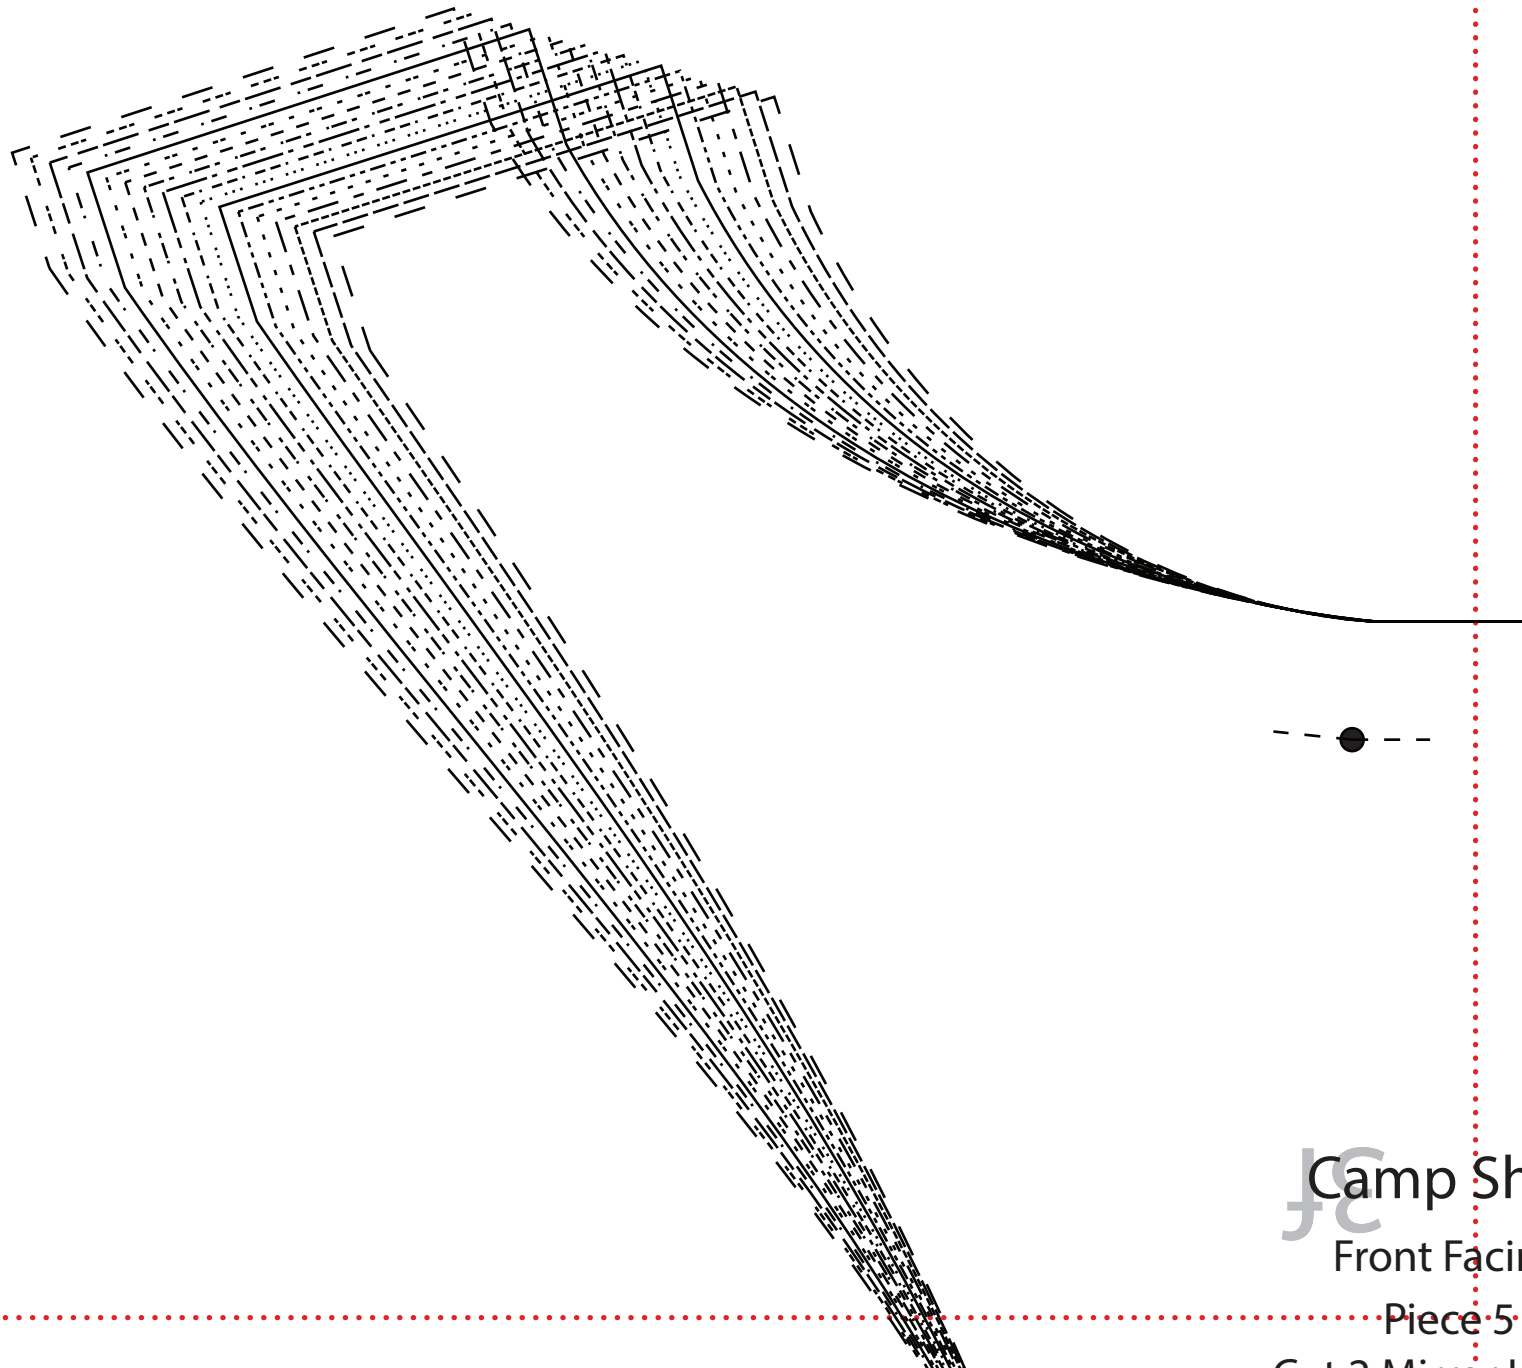

Camp Sh

Front Facin

Piece 5

Cut 2 Mirror

4a

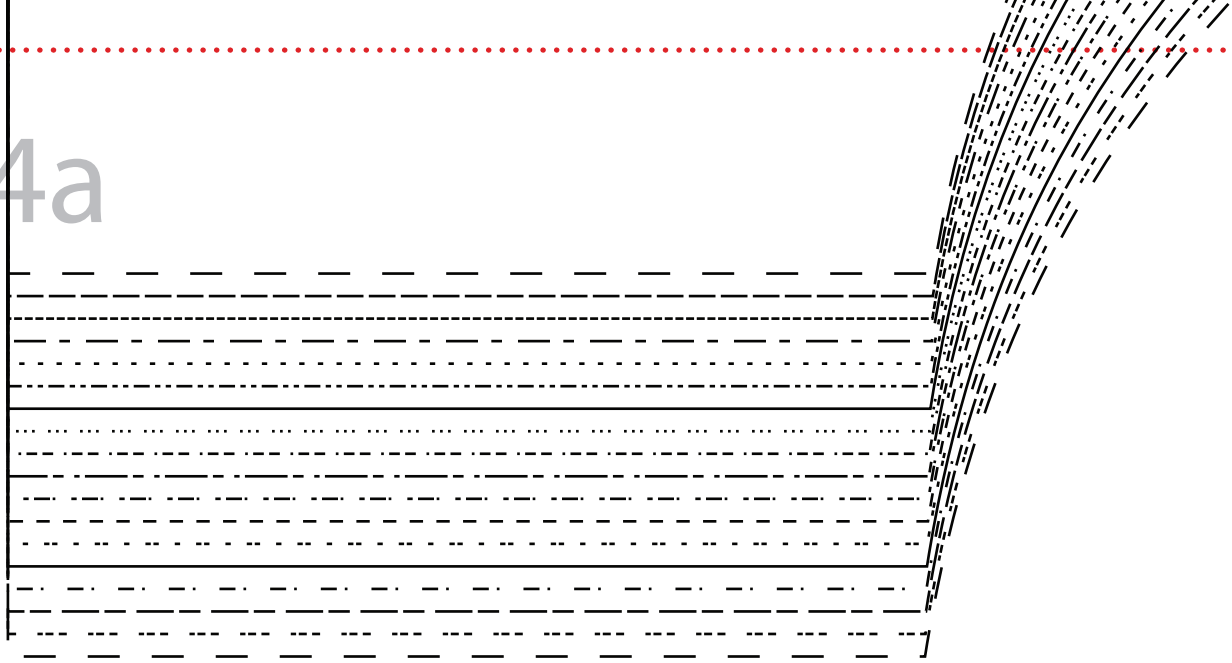

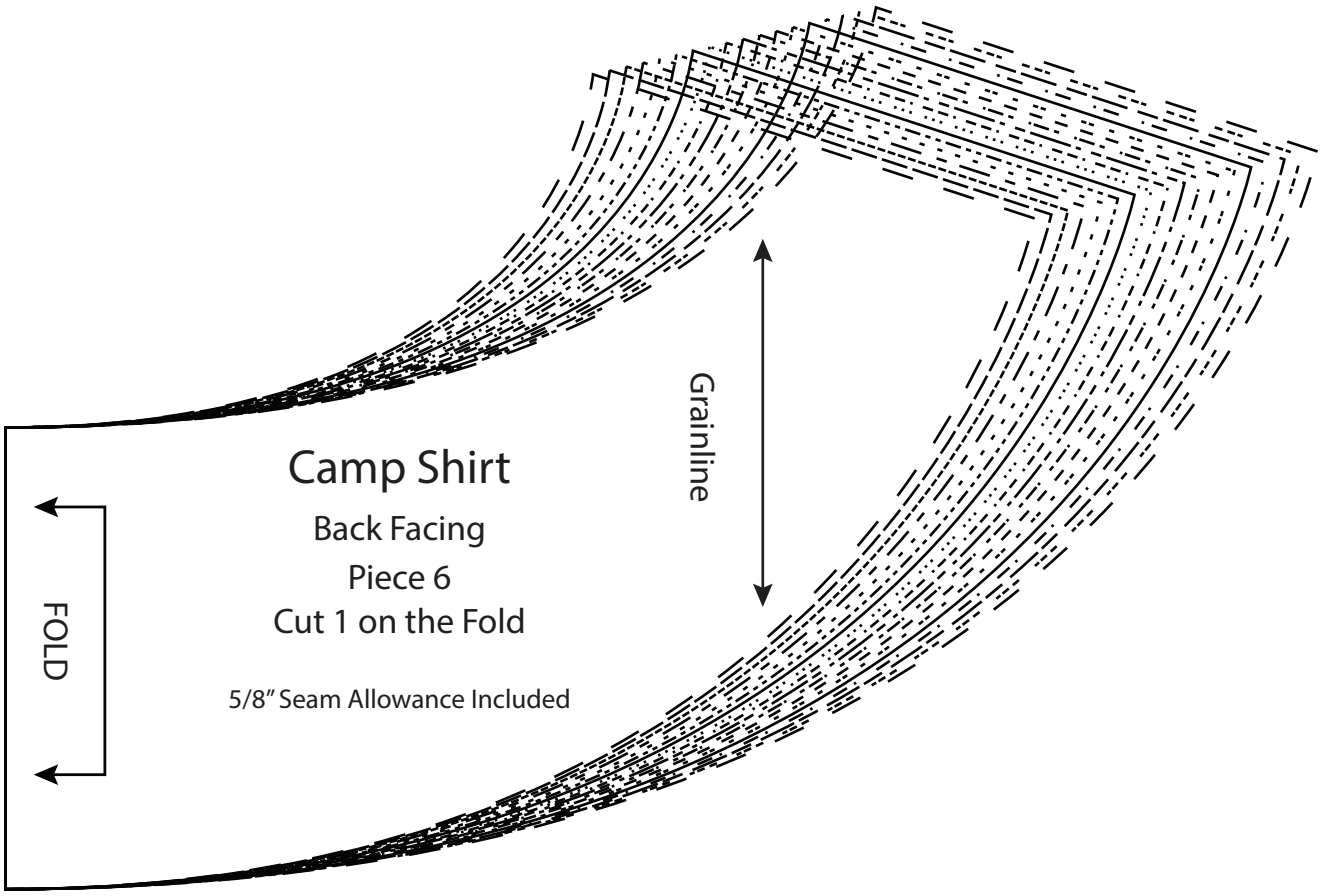
Grainline
Camp Shirt
Back Facing
Piece 6
Cut 1 on the Fold
5/8" Seam Allowance Included
FOLD

4b

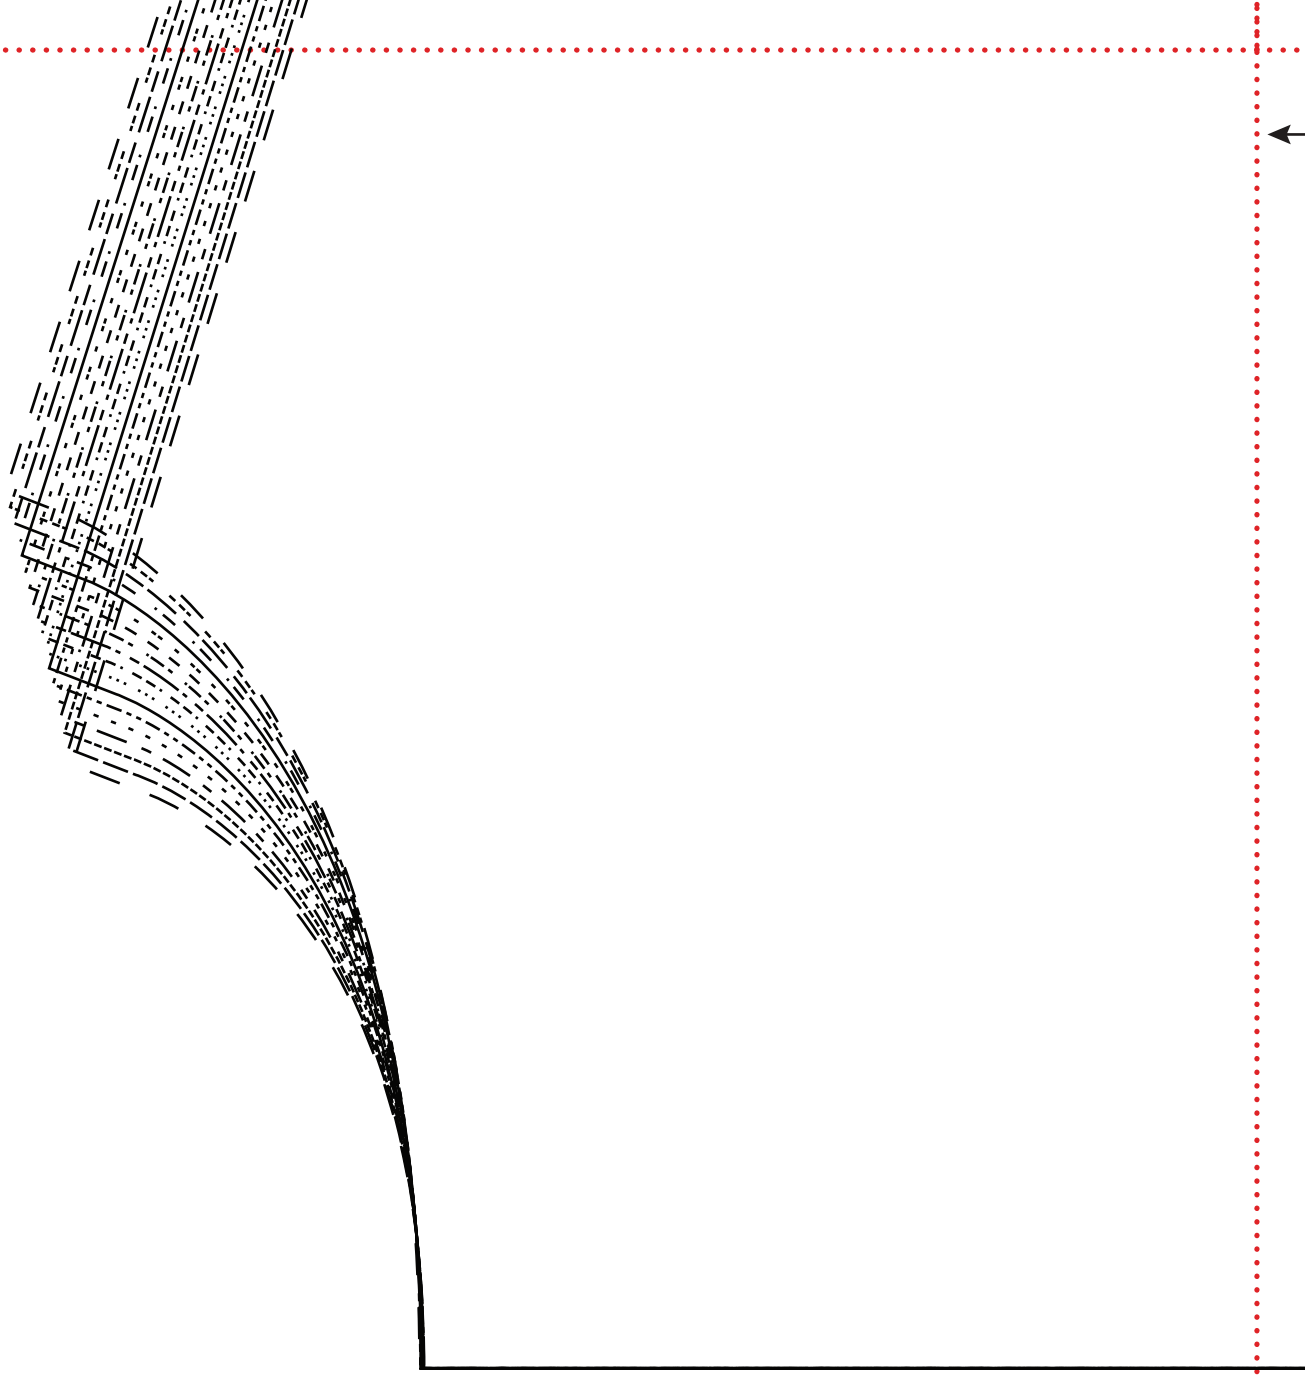

Camp Shirt

Back

Piece 2

Cut 1 Mirror Image

5/8" Seam Allowance Included

4c

Grainline

FOLD

4d

Lengthen/Shorten
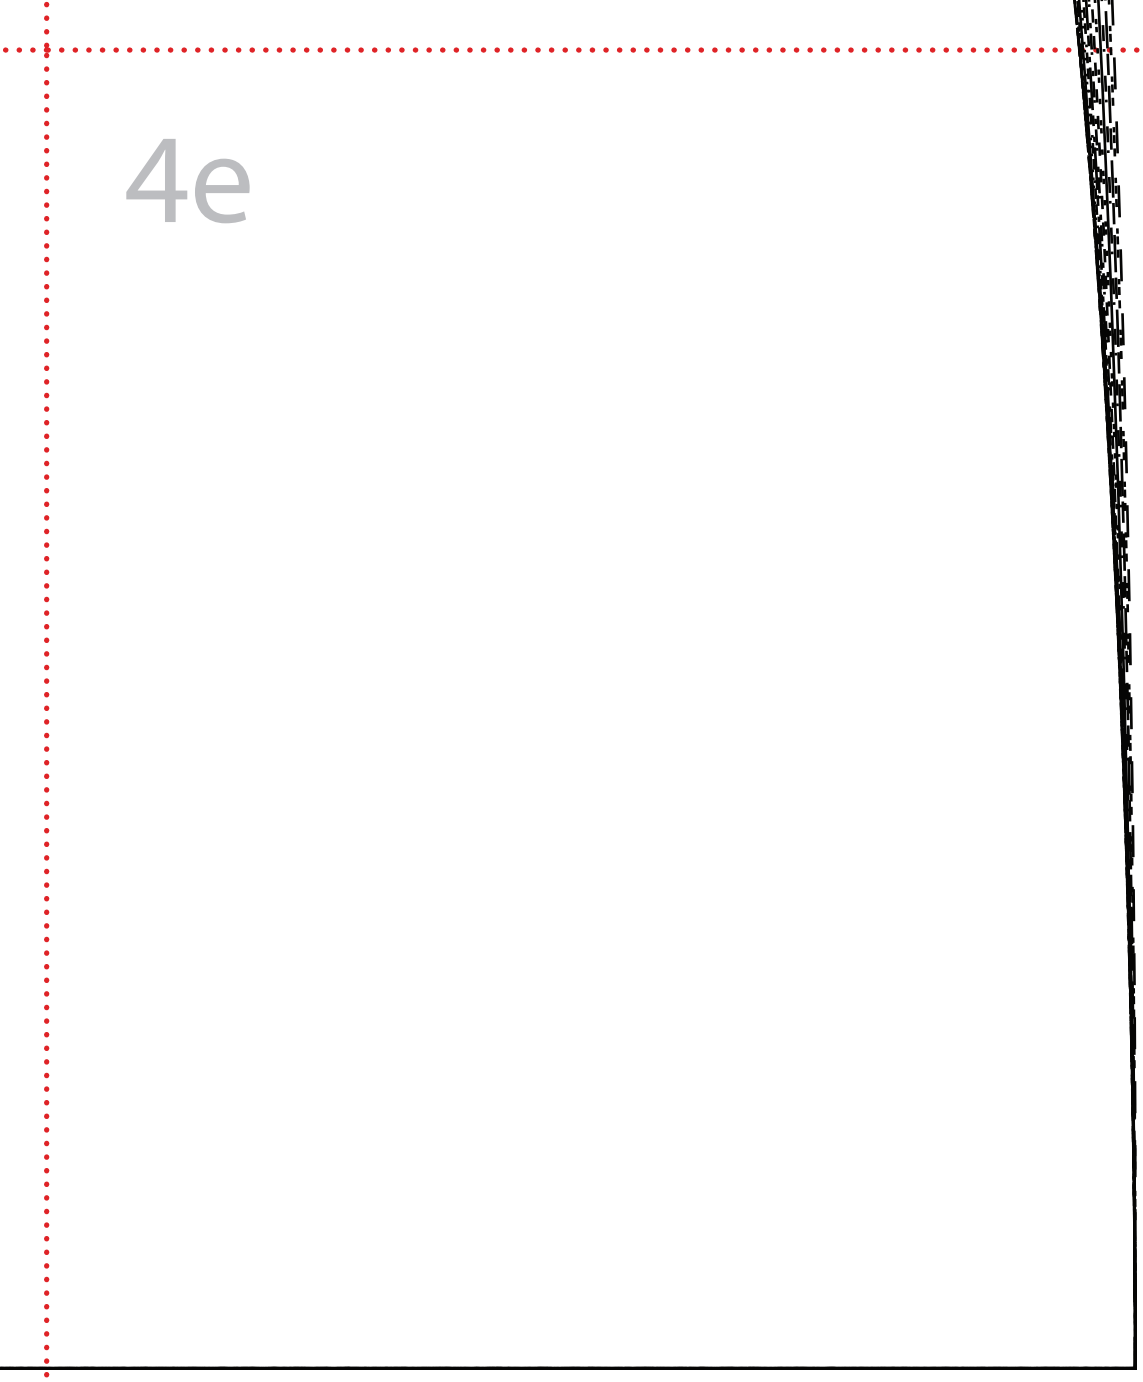
4e